



www.tranzx.com

80, NAN DEE LANE, SHAN HSI VILLAGE, SHOU SHUI HSIANG,
504 CHANG HUA HSIEN, TAIWAN R.O.C.

T: +886-4-7681756 F: +886-4-7680575



DROPPER POST

www.tranzx.com



CONTENTS

ELECTRONIC	02
PERFORMANCE	03
LIGHT WEIGHT	09
VALUE	11
PINOCCHIO	12
TRAVEL ADJUST	14
SUSPENSION	18
LEVER	20



NEW

EDP01

ISO MTB / Pat.

Electronic Dropper Post with bluetooth connection, zero hassle of cable routing. Experience new tech within your reach.

- Material

Offset

Dia.

Length

Weight

Finish

Shaft finish
- Alloy #7075-T651

0 mm.

30.9 / 31.6 / 34.9

395 mm. / Travel 125mm.
445 mm. / Travel 150mm.
485 mm. / Travel 170mm.
545 mm. / Travel 200mm.

730 g / 30.9 * 545 mm.
748 g / 31.6 * 545 mm.
684 g / 30.9 * 485 mm.
702 g / 31.6 * 485 mm.
654 g / 30.9 * 445 mm.
672 g / 31.6 * 445 mm.
616 g / 30.9 * 395 mm.
634 g / 31.6 * 395 mm.
66.5 g / Remote Lever
37.5 g / Battery Charger
19 g / Lithium Ion Battery

Sandblasted Black
Hard Anodized Black

- 200

Up to 200 mm Travel

EDP

Electronic


7

Alloy 7075

PSI

Pressure Adjustable

Bluetooth

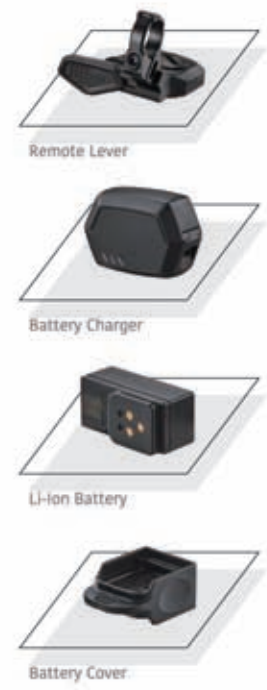

JD-YSP32J

ISO MTB / Pat.

Premium level dropper post with lighter weight and rebound speed adjustable feature.

- Material

Offset

Dia.

Length

Weight

Finish

Shaft finish
- Alloy #7075-T651

0 mm.

30.9 / 31.6 mm.

350 mm. / Travel 100 mm.
400 mm. / Travel 125 mm.
458 mm. / Travel 150 mm.
498 mm. / Travel 170 mm.
558 mm. / Travel 200 mm.

535 g / 30.9 * 458 mm.
555 g / 31.6 * 458 mm.
(excluding cable set 90 g)

Polished Black
Hard Anodized Black

- Internal Routing

Up to 200 mm Travel

7

Alloy 7075

PSI

Pressure Adjustable

Light Weight



YSP23J

ISO MTB / Pat.

Performance level dropper post for riders that don't compromise on the functionality with excellent price point.

Material	Alloy #7075-T651
Offset	0 mm.
Dia.	30.9 / 31.6 mm.
Length	357 mm. / Travel 100 mm. 412 mm. / Travel 125 mm. 459 mm. / Travel 150 mm. 499 mm. / Travel 170 mm. 559 mm. / Travel 200 mm.
Weight	580 g / 30.9 * 459 mm. 600 g / 31.6 * 459 mm. (excluding cable set 90 g)
Finish	Polished Black
Shaft finish	Hard Anodized Black



JD-YSP39J

ISO MTB / Pat.

33.9 and 34.9 OD with long travel options to provide wider application and size fitment.

Material	Alloy #7075-T651
Offset	0 mm.
Dia.	33.9 / 34.9 mm.
Length	356 mm. / Travel 100 mm. 406 mm. / Travel 125 mm. 456 mm. / Travel 150 mm. 496 mm. / Travel 170 mm. 556 mm. / Travel 200 mm.
Weight	650 g / 33.9 * 456 mm. 685 g / 34.9 * 456 mm. (excluding cable set 90 g)
Finish	Polished Black
Shaft finish	Hard Anodized Black



JD-YS110J

ISO MTB / Pat.

Dropper post with 25mm offset head to fit bike frame geometry.

Material	Alloy #7075-T651
Offset	25 mm.
Dia.	30.9 / 31.6 / 33.9 / 34.9 mm.
Length	365 mm. / Travel 100 mm. 415 mm. / Travel 125 mm. 465 mm. / Travel 150 mm. 505 mm. / Travel 170 mm. 565 mm. / Travel 200 mm.
Weight	740 g / 34.9 * 465mm. 780 g / 34.9 * 505mm. (excluding cable set 90 g)
Finish	Polished Black
Shaft finish	Hard Anodized Black




JD-YSP15

ISO MTB ★ / Pat.

Best value ICR (internal cable routing) version offering stealth and clean outlook.

Material	Alloy #6061-T6
Offset	0 mm.
Dia.	30.9 / 31.6 mm.
Length	315 mm. / Travel 80 mm. 360 mm. / Travel 100 mm. 400 mm. / Travel 120 mm. 410 mm. / Travel 125 mm. 470 mm. / Travel 150 mm. 518 mm. / Travel 175 mm.
Weight	565 g / 30.9 * 400 mm. (excluding cable set 90 g)
Finish	Polished Black
Shaft finish	Hard Anodized Black

★ stage-2 standard according to suspension system



JD-YSP19

ISO MTB ★ / Pat.

External routing dropper post with cable coming out from mid cap for zero cable movement when adjusting the height of post.

Material	Alloy #6061-T6
Offset	0 mm.
Dia.	30.9 / 31.6 mm.
Length	305 mm. / Travel 80 mm. 350 mm. / Travel 100 mm. 400 mm. / Travel 125 mm.
Weight	610 g / 30.9 * 400 mm. (excluding cable set 90 g)
Finish	Polished Black
Shaft finish	Hard Anodized Black

★ stage 2 standard according to suspension system



JD-YSP29

ISO MTB / Pat.

150/170 mm travel in external cable routing version to support bike upgrade and routing solution.

Material	Alloy #7075-T651
Offset	0 mm.
Dia.	30.9 / 31.6 mm.
Length	349 mm. / Travel 100 mm. 399 mm. / Travel 125 mm. 449 mm. / Travel 150 mm. 489 mm. / Travel 170 mm.
Weight	610 g / 30.9 * 449 mm. (excluding cable set 90 g)
Finish	Polished Black
Shaft finish	Hard Anodized Black



JD-YSP22

ISO MTB ★ / Pat.

External routing dropper post with cable coming out from mid cap for zero cable movement when adjusting the height of post.

Material	Alloy #7075-T651 & SAE4130 (27.2 mm.) Alloy #6061-T6 (30.9 / 31.6 mm.)
Offset	19 mm. (27.2 mm.) 21 mm. (30.9 / 31.6 mm.)
Dia.	27.2 / 30.9 / 31.6 mm.
Length	300 mm. / Travel 65 mm. (27.2 mm.) 350 mm. / Travel 85 mm. (27.2 mm.) 400 mm. / Travel 105 mm. (27.2 mm.) 315 mm. / Travel 80 mm. (30.9 / 31.6 mm.) 360 mm. / Travel 100 mm. (30.9 / 31.6 mm.) 410 mm. / Travel 125 mm. (30.9 / 31.6 mm.)
Weight	605 g / 27.2 * 400 mm. 610 g / 30.9 * 410 mm. (excluding cable set 90 g)
Finish	Polished Black Sandblasted Black (27.2 mm.)
Shaft finish	Hard Anodized Black (30.9 / 31.6 mm.) QPQ (27.2 mm.)

★ stage 2 standard according to suspension system




JD-YSP36

ISO MTB / Pat.

One piece 3D forged shaft 27.2 external routing dropper post

Material	Alloy #7075-T651
Offset	0 mm.
Dia.	27.2 mm.
Length	305 mm. / Travel 70 mm. 367 mm. / Travel 90 mm. 395 mm. / Travel 110 mm.
Weight	525 g / 27.2 * 395 mm. (excluding cable set 90 g)
Finish	Sandblasted Black.
Shaft finish	Hard Anodized Black



JD-YSP38J

ISO MTB / Pat.

One piece 3D forged shaft 27.2 internal routing dropper post.

Material	Alloy #7075-T651
Offset	0 mm.
Dia.	27.2 mm.
Length	315 mm. / Travel 70 mm. 377 mm. / Travel 90 mm. 405 mm. / Travel 110 mm.
Weight	490 g / 27.2 * 405 mm. (excluding cable set 90 g)
Finish	Sandblasted Black
Shaft finish	Hard Anodized Black



JD-YSP20J

ISO MTB ★ / ROAD

Unique stealth road style dropper post featuring duo height adjustable, providing clean outlook for Roadies.

Material	Alloy #7075-T651 & SAE4130
Offset	20 mm.
Dia.	27.2 mm.
Adjust Height	35 mm.
Travel	50 mm.
Length	365 mm.
Weight	495 g (excluding cable set 90 g)
Finish	Polished Black
Shaft finish	QPQ

★ stage 2 standard according to suspension system



JD-YS101J

ISO MTB / Pat.

50 mm short travel and light weight dropper designed for road, gravel, adventure and touring application (Internal version)

Material	Alloy #7075-T651
Offset	0 mm.
Dia.	27.2 / 30.9 / 31.6 mm.
Travel	50 mm.
Length	350 mm. / 400 mm.
Weight	475 g / 30.9 * 400 mm. 440 g / 30.9 * 350 mm. 430 g / 27.2 * 400 mm. 400 g / 27.2 * 350 mm. (excluding cable set 90 g)
Finish	Polished Black Sandblasted Black (27.2 mm.)
Shaft finish	Hard Anodized Black



JD-YSE01

ISO MTB / Pat.

50 mm short travel and light weight dropper designed for road, gravel, adventure and touring application (External version)

Material	Alloy #7075-T651
Offset	0 mm.
Dia.	27.2 / 30.9 / 31.6 mm.
Travel	50 mm.
Length	350 mm. / 400 mm.
Weight	475 g / 30.9 * 400 mm. 440 g / 30.9 * 350 mm. 465 g / 27.2 * 400 mm. 435 g / 27.2 * 350 mm. (excluding cable set 90 g)
Finish	Polished Black Sandblasted Black (27.2 mm.)
Shaft finish	Hard Anodized Black



YSI16

ISO MTB

Light weight dropper post suitable for XC, gravel, all road application

Material	Alloy #7075-T651 (27.2) Alloy #6066-T6 (30.9&31.6)
Offset	0 mm
Dia.	27.2 / 30.9 / 31.6
Length	27.2 340 mm. / Travel 70 mm. 390 mm. / Travel 70 mm. 390 mm. / Travel 100 mm. 30.9 / 31.6 350 mm. / Travel 70 mm. 350 mm. / Travel 100 mm. 400 mm. / Travel 70 mm. 400 mm. / Travel 100 mm.
Weight	27.2 382 g * 340 mm. / Travel 70 mm. 412 g * 390 mm. / Travel 70 mm. 412 g * 390 mm. / Travel 100 mm. 31.6 439 g * 350 mm. / Travel 70 mm. 430 g * 350 mm. / Travel 100 mm. 465 g * 400 mm. / Travel 70 mm. 473 g * 400 mm. / Travel 100 mm. (excluding cable set 90 g)
Finish	Polished Black
Shaft finish	Hard Anodized Black



Internal Routing



Alloy 6066



Alloy 7075



Light Weight



YSI36

ISO MTB

Ultra light weight dropper post suitable for XC, gravel, all road application

Material	Alloy #6066-T6 (Travel 100 & 120 mm.) Alloy #7075-T615 (Travel 150, 170, 200 mm.)
Offset	0 mm
Dia.	30.9 / 31.6
Length	328 mm. / Travel 100 mm. 390 mm. / Travel 100 mm. 373 mm. / Travel 120 mm. 436 mm. / Travel 150 mm. 479 mm. / Travel 170 mm. 545 mm. / Travel 200 mm.
Weight	376 g / 31.6 * 328 mm. / Travel 100 mm. 411 g / 31.6 * 373 mm. / Travel 120 mm. 412 g / 31.6 * 390 mm. / Travel 100 mm. 469 g / 31.6 * 436 mm. / Travel 150 mm. 498 g / 31.6 * 479 mm. / Travel 170 mm. 556 g / 31.6 * 545 mm. / Travel 200 mm. (excluding cable set 90 g)
Finish	Polished Black
Shaft finish	Hard Anodized Black



Internal Routing



Alloy 7075



Light Weight



JD-YSP18P

ISO MTB ★ / Pat.

Entry level internal routing post with competitive cost and high quality balance.

Material	Alloy #6061-T6
Offset	0 mm
Dia.	30.9 / 31.6 mm.
Length	318 mm. / Travel 80 mm. 361 mm. / Travel 100 mm. 403 mm. / Travel 120 mm. 425 mm. / Travel 130 mm. 470 mm. / Travel 150 mm. 515 mm. / Travel 170 mm.
Weight	560 g / 30.9 * 403 mm. 580 g / 31.6 * 403 mm. (excluding cable set 90 g)
Finish	Polished Black
Shaft finish	Hard Anodized Black

★ Itage 2 standard according to suspension system



Internal Routing



Best Value



Alloy 6061



YSI34

ISO MTB

Exceptional value and quality dropper post in 34.9 optimised size

Material	Alloy #6061
Offset	0 mm
Dia.	34.9 mm.
Length	349 mm. / Travel 100 mm. 399 mm. / Travel 125 mm. 456 mm. / Travel 150 mm. 496 mm. / Travel 170 mm. 556 mm. / Travel 200 mm.
Weight	493 g / 349 mm. 524 g / 399 mm. 599 g / 456 mm. 633 g / 496 mm. 685 g / 556 mm. (excluding cable set 90 g)
Finish	Polished Black
Shaft finish	Hard Anodized Black



Internal Routing



34.9 Diameter



Alloy 6061



Up to 200 mm Travel



JD-YSP01V

ISO MTB ★

AM bike adjustable seat post - Freely, fit the terrain you meet! The Pinocchio tool less height MICRO adjustable post offers a quick and easy lowering task.

- * Reliable and solid technology - Virtually No Play!
- * Exquisite elegant and easy assembling w/low profile head design

Material	Alloy #7075-T651 & SAE4130 (27.2 mm.) Alloy #6061-T6 (30.9 / 31.6 mm.)
Offset	15 mm.
Dia.	27.2 / 30.9 / 31.6 mm.
Length	340 mm. / Travel 80 mm. (27.2 mm.) 390 mm. / Travel 100 mm. (27.2 mm.) 318 mm. / Travel 80 mm. (30.9 / 31.6 mm.) 361 mm. / Travel 100 mm. (30.9 / 31.6 mm.) 402 mm. / Travel 120 mm. (30.9 / 31.6 mm.)
Weight	615 g / 30.9 * 400 mm. 623 g / 27.2 * 390 mm.
Finish	Polished Black Sandblasted Black (27.2 mm.)
Shaft finish	Hard Anodized Black (30.9 / 31.6 mm.) QPQ (27.2 mm.)

★ size 2 standard according to suspension system



Alloy 6061



Alloy 7075



27.2 Diameter



JD-YSP50

ISO MTB

Entry level dropper post suitable for city, trekking, or cargo bikes; offering the ease to adjust saddle height and safer with feet on the ground while bike stop.

Material	Alloy #6061-T6
Offset	12 mm.
Dia.	27.2 / 30.9 / 31.6 mm.
Length	400 mm. / Travel 50 mm. (27.2 mm.) 357 mm. / Travel 100 mm. (30.9 / 31.6 mm.) 403 mm. / Travel 120 mm. (30.9 / 31.6 mm.) 472 mm. / Travel 150 mm. (30.9 / 31.6 mm.) 518 mm. / Travel 170 mm. (30.9 / 31.6 mm.)
Weight	589 g / 27.2 * 400 mm. 795 g / 31.6 * 518 mm.
Finish	Polished Black Sandblasted Black
Shaft finish	Hard Anodized Black



Alloy 6061



Best Value



27.2 Diameter






YSI35

NEW

ISO MTB

Premium dropper post features patented convex post head for shorter overall length and stack height, centered bottom actuator for better clearance, +RAD travel adjust bushing system

Material	Alloy #7075-T651
Offset	0 mm.
Dia.	30.9 / 31.6 / 34.9 mm.
Travel Adjust	25 mm. (5 mm. / step)
Length	30.9 / 31.6 348 mm. / Travel 110mm. 34.9 411 mm. / Travel 140mm. 451mm. / Travel 160 mm. 451 mm. / Travel 160mm. 491mm. / Travel 180 mm. 491 mm. / Travel 180mm. 551mm. / Travel 210 mm. 551 mm. / Travel 210mm.
Weight	652 g / 34.9 * 551 mm. (excluding cable set 90 g)
Finish	Polished Black
Shaft finish	Hard Anodized Black

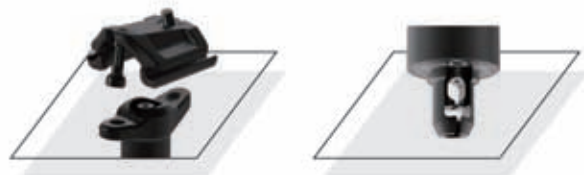

- Internal Routing
- Up to 210 mm Travel
- +RAD Travel Adjust
- Alloy 7075
- Pressure Adjustable



JD-YSI08

ISO MTB

Premium dropper post with shorter overall length and stack height, featuring air valve to adjust rebound speed and +RAD for travel adjust fitment

Material	Alloy #7075-T651
Offset	0 mm.
Travel Adjust	25 mm. (5 mm. / step)
Dia.	30.9 / 31.6 / 34.9 mm.
Length	387 mm. / Travel 125 mm. 442 mm. / Travel 150 mm. 482 mm. / Travel 170 mm. 542 mm. / Travel 200 mm. 612 mm. / Travel 230 mm.
Weight	570 g / 30.9 * 542 mm. 500 g / 30.9 * 442 mm. 645 g / 34.9 * 542 mm. (excluding cable set 90 g)
Finish	Polished Black
Shaft finish	Hard Anodized Back

- Internal Routing
- Up to 230 mm Travel
- +RAD Travel Adjust
- Alloy 7075
- Pressure Adjustable



JD-YSI20

ISO MTB

Long travel 27.2 dropper post with travel adjust feature

Material	Alloy #7075-T651
Offset	0 mm.
Dia.	27.2 mm.
Travel Adjust	25 mm. (5 mm. / step)
Length	400 mm. / Travel 100 mm. 450 mm. / Travel 125 mm.
Weight	440 g / 27.2 * 450 mm. 410 g / 27.2 * 400 mm. (excluding cable set 90 g)
Finish	Polished Black
Shaft finish	Hard Anodized Black

- Internal Routing
- Up to 125 mm Travel
- +RAD Travel Adjust
- Alloy 7075
- 27.2 Diameter



JD-YSI05J

ISO MTB / Pat.

Adjustable Travel Dropper Post with patented bushing, allowing adjustment for better fitment to different rider's height

Material	Alloy #7075-T651
Travel Adjust	30 mm. (5 mm / step)
Offset	0 mm.
Dia.	30.9 / 31.6 / 34.9 mm.
Length	409 mm. / Travel 125 mm. to 95 mm. 459 mm. / Travel 150 mm. to 120 mm. 499 mm. / Travel 170 mm. to 140 mm. 559 mm. / Travel 200 mm. to 170 mm.
Weight	575 g / 30.9 * 459 mm. 595 g / 31.6 * 459 mm. (excluding cable set 90 g)
Finish	Sand Blasted Black
Shaft finish	Hard Anodized Black



JD-YSI13J

ISO MTB / Pat.

Adjustable Travel Dropper Post with patented bushing, allowing adjustment for better fitment to different rider's height (Valved cartridge version)

Material	Alloy #7075-T651
Travel Adjust	30 mm. (5 mm. / step)
Offset	0 mm.
Dia.	30.9 / 31.6 mm.
Length	408 mm. / Travel 125 mm. to 95 mm. 458 mm. / Travel 150 mm. to 120 mm. 498 mm. / Travel 170 mm. to 140 mm. 558 mm. / Travel 200 mm. to 170 mm.
Weight	535 g / 30.9 * 458 mm. 555 g / 31.6 * 458 mm. (excluding cable set 90 g)
Finish	Sand Blasted Black
Shaft finish	Hard Anodized Black



YSI15

ISO MTB

Award winning integrated seat clamp dropper post without the need for custom frame, and infinite travel adjust for wide range of rider's fitment

Material	Alloy #7075-T651
Offset	0 mm.
Dia.	30.9 / Seat Clamp Dia. 34.9 mm. 31.6 / Seat Clamp Dia. 34.9 mm. 34.9 / Seat Clamp Dia. 38.6 or 38.9 mm.
Length	660 mm. / Travel 225 mm. 602 mm. / Travel 200 mm. 547 mm. / Travel 175 mm. 492 mm. / Travel 150 mm. 432 mm. / Travel 125 mm.
Weight	808 g / 31.6 * 660 mm. / Travel 225 mm. 785 g / 30.9 * 660 mm. / Travel 225 mm. 745 g / 31.6 * 602 mm. / Travel 200 mm. 726 g / 30.9 * 602 mm. / Travel 200 mm. 702 g / 31.6 * 547 mm. / Travel 175 mm. 682 g / 30.9 * 547 mm. / Travel 175 mm. 890 g / 34.9 * 660 mm. / Travel 225 mm. 826 g / 34.9 * 602 mm. / Travel 200 mm. 773 g / 31.6 * 547 mm. / Travel 175 mm.
Finish	Polished Black
Shaft finish	Hard Anodized Black





JD-YSP28

ISO MTB ★ / Pat.

Suspension+Dropper; Combining the comfort of suspension post and the safety of dropper post, suitable for a broad range of bikes. With the unique air pressure adjustable, suspension stiffness can be adjusted easily to fit with different riders' weight and preferences. (Internal version)

Material	Alloy #7075-T651 & SAE4130 (27.2 mm.) Alloy #7075-T651 (30.9 / 31.6 mm.)
Offset	0 mm.
Dia.	27.2 / 30.9 / 31.6 mm.
Damp Travel	30 ~ 70 mm.
Length	340 mm. / Travel 80 mm. (27.2 mm.) 390 mm. / Travel 100 mm. (27.2 mm.) 322 mm. / Travel 80 mm. (30.9 / 31.6 mm.) 362 mm. / Travel 100 mm. (30.9 / 31.6 mm.) 402 mm. / Travel 120 mm. (30.9 / 31.6 mm.) 462 mm. / Travel 150 mm. (30.9 / 31.6 mm.) 502 mm. / Travel 170 mm. (30.9 / 31.6 mm.) 562 mm. / Travel 200 mm. (30.9 / 31.6 mm.)
Weight	590 g / 30.9 * 403 mm. 600 g / 27.2 * 390 mm. (excluding cable set 90 g)
Finish	Polished Black Sandblasted Black (27.2 mm.)
Shaft finish	Hard Anodized Black (30.9 / 31.6 mm.) QPQ (27.2 mm.)

★ stage 2 standard according to suspension system



JD-YSP30

ISO MTB ★ / Pat.

Suspension + Dropper + Air insert External routing version
Suspension adjustable by inserting air according to pressure and user performance

Material	Alloy #7075-T651 & SAE4130 (27.2 mm.) Alloy #7075-T651 (30.9 / 31.6 mm.)
Offset	0 mm.
Dia.	27.2 / 30.9 / 31.6 mm.
Damp Travel	30 ~ 70 mm.
Length	380 mm. / Travel 100 mm (27.2 mm.) 352 mm. / Travel 100 mm (30.9 / 31.6 mm.) 392 mm. / Travel 120 mm(30.9 / 31.6 mm.)
Weight	610 g / 30.9 * 392 mm (30.9 mm.) 620 g / 27.2 * 380 mm (27.2 mm.) (excluding cable set 90 g)
Finish	Polished Black Sandblasted Black (27.2 mm.)
Shaft finish	Hard Anodized Black (30.9 / 31.6 mm.) QPQ (27.2 mm.)

★ stage 2 standard according to suspension system



JD-YSP16J

ISO MTB ★ / Pat.

A good balance of comfort and safe ride by combining suspension function with saddle height adjustable.

Material	Alloy #7075-T651 & SAE4130 (27.2 mm.) Alloy #6061-T6 (30.9 / 31.6 mm.)
Offset	10 mm.
Dia.	27.2 / 30.9 / 31.6 mm.
Damp Travel	40 mm.
Length	377 mm. / Travel 50 mm. 417 mm. / Travel 70 mm.
Weight	535 g / 27.2 * 375 mm. (excluding cable set 90 g)
Finish	Polished Black Sandblasted Black (27.2 mm.)
Shaft finish	Hard Anodized Black (30.9 / 31.6 mm.) QPQ (27.2 mm.)

★ stage 1, 2 standard according to suspension system



YSI18

ISO MTB

Combination of dropper post and parallelogram suspension that offer the best blend of both worlds. Changeable elastomer stiffness to fit different needs and rider's weight.

Material	Alloy #7075-T651 & SAE4130 (27.2 mm.) Alloy #7075-T651 (30.9 / 31.6 mm.)
Offset	11 mm.
Dia.	27.2 / 30.9 / 31.6 mm
Length	355 mm. / Travel 70 mm. (27.2) 400 mm. / Travel 90 mm. (27.2) 347 mm. / Travel 70 mm. (30.9 / 31.6 mm.) 413 mm. / Travel 100 mm. (30.9 / 31.6 mm.)
Weight	628 g / 27.2*355 mm. 679 g / 27.2*400 mm. 599 g / 31.6 * 347 mm. 660 g / 31.6 * 413 mm. (excluding cable set 90 g)
Finish	Polished Black
Shaft finish	QPQ (27.2 mm.) Hard Anodized Black (30.9 / 31.6 mm.)
Elastomer	#50 / #70 / #90

★ 90 is factory standard #50 / #70 are optional



REVERSED CABLE LEVER OPTIONS

J 22.2 / 24 / 31.8 Clamp



J 22.2 Clamp



J 24 Clamp for drop bar



J 31.8 Clamp for drop bar



KL



KL2 (I-Spec II mount)

MULTI POSITION 1X LEVER

FL 22.2 Clamp



FL2 (I-Spec II mount)

DROP BAR LEVER

DL 24 Clamp



BEARING 1X LEVER

GL



GL 22.2 Clamp



GL2 (I-Spec II mount)

