

**TranzX**  
inspiring your ride

www.tranzx.com

80, NAN DEE LANE, SHAN HSI VILLAGE, SHOU SHUI HSIANG,  
504 CHANG HUA HSIEN, TAIWAN R.O.C.  
T:+886-4-7681756 F:+886-4-7680575

**TranzX**  
inspiring your ride

**20**  
**23**

**DROPPER POST**





# DROPPER POST

## JD-YSP32J

ISO MTB / Pat.

Premium level dropper post with lighter weight and rebound speed adjustable feature.

|              |                                                                                                                                     |
|--------------|-------------------------------------------------------------------------------------------------------------------------------------|
| Material     | Alloy #7075-T651                                                                                                                    |
| Offset       | 0 mm.                                                                                                                               |
| Dia.         | 30.9/ 31.6 mm.                                                                                                                      |
| Length       | 350 mm./ Travel 100 mm.<br>400 mm./ Travel 125 mm.<br>458 mm./ Travel 150 mm.<br>498 mm./ Travel 170 mm.<br>558 mm./ Travel 200 mm. |
| Weight       | 535g/ 30.9 * 458 mm.<br>555g/ 31.6 * 458 mm.<br>(excluding the cable set 90g.)                                                      |
| Finish       | Polished Black                                                                                                                      |
| Shaft finish | Hard Anodized Black                                                                                                                 |

-  Internal Routing
-  Alloy 7075
-  Pressure Adjustable
-  Up to 200 mm Travel
-  Light Weight



## YSP23J

ISO MTB / Pat.

Performance level dropper post for riders that don't compromise on the functionality with excellent price point.

|              |                                                                                                                                     |
|--------------|-------------------------------------------------------------------------------------------------------------------------------------|
| Material     | Alloy #7075-T651                                                                                                                    |
| Offset       | 0 mm.                                                                                                                               |
| Dia.         | 30.9/ 31.6 mm.                                                                                                                      |
| Length       | 357 mm./ Travel 100 mm.<br>412 mm./ Travel 125 mm.<br>459 mm./ Travel 150 mm.<br>499 mm./ Travel 170 mm.<br>559 mm./ Travel 200 mm. |
| Weight       | 580g/ 30.9 * 459 mm.<br>600g/ 31.6 * 459 mm.<br>(excluding the cable set 90g.)                                                      |
| Finish       | Polished Black                                                                                                                      |
| Shaft finish | Hard Anodized Black                                                                                                                 |

-  Internal Routing
-  Alloy 7075
-  Up to 200 mm Travel



## JD-YSP39J

ISO MTB / Pat.

33.9 and 34.9 OD with long travel options to provide wider application and size fitment.

|              |                                                                                                                                     |
|--------------|-------------------------------------------------------------------------------------------------------------------------------------|
| Material     | Alloy #7075-T651                                                                                                                    |
| Offset       | 0 mm.                                                                                                                               |
| Dia.         | 33.9/ 34.9 mm.                                                                                                                      |
| Length       | 356 mm./ Travel 100 mm.<br>406 mm./ Travel 125 mm.<br>456 mm./ Travel 150 mm.<br>496 mm./ Travel 170 mm.<br>556 mm./ Travel 200 mm. |
| Weight       | 650g/ 33.9 * 456 mm.<br>685g/ 34.9 * 456 mm.<br>(excluding cable set 90g.)                                                          |
| Finish       | Polished Black                                                                                                                      |
| Shaft finish | Hard Anodized Black                                                                                                                 |

-  Internal Routing
-  Alloy 7075
-  34.9 Diameter
-  Up to 200 mm Travel
-  33.9 Diameter






## JD-YSI10J

ISO MTB / Pat.

Dropper post with 25mm offset head to fit bike frame geometry.

|              |                                                                                                                           |
|--------------|---------------------------------------------------------------------------------------------------------------------------|
| Material     | Alloy #7075-T651                                                                                                          |
| Function     | Control lever up & down                                                                                                   |
| Offset       | 25 mm.                                                                                                                    |
| Dia.         | 30.9/31.6/33.9/34.9 mm.                                                                                                   |
| Length       | 365mm./ Travel 100mm.<br>415mm./ Travel 125mm.<br>465mm./ Travel 150mm.<br>505mm./ Travel 170mm.<br>565mm./ Travel 200mm. |
| Weight       | 740g/ 34.9 * 465mm.<br>780g/ 34.9 * 505mm.<br>(excluding the cable set 90g.)                                              |
| Finish       | Polished Black                                                                                                            |
| Shaft finish | Hard Anodized Black                                                                                                       |

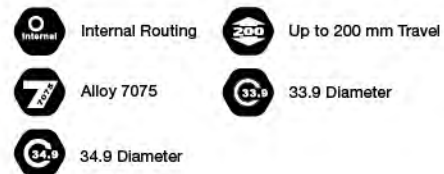


## JD-YSP15

ISO MTB ★ / Pat.

Best value ICR (internal cable routing) version offering stealth and clean outlook.

|              |                                                                                                                                                               |
|--------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Material     | Alloy #6061-T6                                                                                                                                                |
| Offset       | 0 mm.                                                                                                                                                         |
| Dia.         | 30.9/ 31.6 mm.                                                                                                                                                |
| Length       | 315 mm./ Travel 80 mm.<br>360 mm./ Travel 100 mm.<br>400 mm./ Travel 120 mm.<br>410 mm./ Travel 125 mm.<br>470 mm./ Travel 150 mm.<br>518 mm./ Travel 175 mm. |
| Weight       | 565g/ 30.9 * 400 mm.<br>(excluding cable set 90g.)                                                                                                            |
| Finish       | Polished Black                                                                                                                                                |
| Shaft finish | Hard Anodized Black                                                                                                                                           |
| ★ stage 2    | standard according to suspension system                                                                                                                       |




## JD-YSP18P

ISO MTB ★ / Pat.

Entry level internal routing post with competitive cost and high quality balance.

|              |                                                                                                                                                               |
|--------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Material     | Alloy #6061-T6                                                                                                                                                |
| Offset       | 0 mm.                                                                                                                                                         |
| Dia.         | 30.9/ 31.6 mm.                                                                                                                                                |
| Length       | 318 mm./ Travel 80 mm.<br>361 mm./ Travel 100 mm.<br>403 mm./ Travel 120 mm.<br>425 mm./ Travel 130 mm.<br>470 mm./ Travel 150 mm.<br>515 mm./ Travel 170 mm. |
| Weight       | 560g/ 30.9 * 403 mm.<br>580g/ 31.6 * 403 mm.<br>(excluding cable set 100g.)                                                                                   |
| Finish       | Polished Black                                                                                                                                                |
| Shaft finish | Hard Anodized Black                                                                                                                                           |
| ★ stage 2    | standard according to suspension system                                                                                                                       |



## YSI34

ISO MTB

Exceptional value and quality dropper post in 34.9 optimised size

|              |                                                                                                                                                        |
|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|
| Material     | Alloy #6061                                                                                                                                            |
| Offset       | 0 mm.                                                                                                                                                  |
| Dia.         | 34.9 mm.                                                                                                                                               |
| Length       | 349 mm./ Travel 100 mm.<br>399 mm./ Travel 125 mm.<br>456 mm./ Travel 150 mm.<br>496 mm./ Travel 170 mm.<br>556 mm./ Travel 200 mm.                    |
| Weight       | 495g/ 34.9 * 342 mm.<br>543g/ 34.9 * 392 mm.<br>606g/ 34.9 * 449 mm.<br>637g/ 34.9 * 489 mm.<br>695g/ 34.9 * 549 mm.<br>(excluding the cable set 90g.) |
| Finish       | Polished Black                                                                                                                                         |
| Shaft finish | Hard Anodized Black                                                                                                                                    |



JD-YSP19

ISO MTB ★ / Pat.

External routing dropper post with cable coming out from mid cap for zero cable movement when adjusting the height of post.

|                                                   |                                                                              |
|---------------------------------------------------|------------------------------------------------------------------------------|
| Material                                          | Alloy #6061-T6                                                               |
| Offset                                            | 0 mm.                                                                        |
| Dia.                                              | 30.9/ 31.6 mm.                                                               |
| Length                                            | 305 mm./ Travel 80 mm.<br>350 mm./ Travel 100 mm.<br>400 mm./ Travel 125 mm. |
| Weight                                            | 610g/ 30.9 * 400 mm.<br>(excluding cable set 90g.)                           |
| Finish                                            | Polished Black                                                               |
| Shaft finish                                      | Hard Anodized Black                                                          |
| ★ stage 2 standard according to suspension system |                                                                              |



JD-YSP29

ISO MTB / Pat.

150/170 mm travel in external cable routing version to support bike upgrade and routing solution.

|              |                                                                                                          |
|--------------|----------------------------------------------------------------------------------------------------------|
| Material     | Alloy #7075-T651                                                                                         |
| Offset       | 0 mm.                                                                                                    |
| Dia.         | 30.9/ 31.6 mm.                                                                                           |
| Length       | 349 mm./ Travel 100 mm.<br>399 mm./ Travel 125 mm.<br>449 mm./ Travel 150 mm.<br>489 mm./ Travel 170 mm. |
| Weight       | 610g/ 30.9 * 449 mm.<br>(excluding cable set 90g.)                                                       |
| Finish       | Polished Black                                                                                           |
| Shaft finish | Hard Anodized Black                                                                                      |




JD-YSP22

ISO MTB ★ / Pat.

External routing dropper post with cable coming out from mid cap for zero cable movement when adjusting the height of post.

|                                                   |                                                                                                                                                                                                                                              |
|---------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Material                                          | Alloy #7075-T651 & SAE4130 (27.2 mm.)<br>Alloy #6061-T6 (30.9/31.6 mm.)                                                                                                                                                                      |
| Offset                                            | 19 mm.(27.2 mm.)<br>21 mm.(30.9/31.6 mm.)                                                                                                                                                                                                    |
| Dia.                                              | 27.2/30.9/31.6 mm.                                                                                                                                                                                                                           |
| Length                                            | 300 mm./ Travel 65 mm. (27.2 mm.)<br>350 mm./ Travel 85 mm. (27.2 mm.)<br>400 mm./ Travel 105 mm. (27.2 mm.)<br>315 mm./ Travel 80 mm. (30.9/31.6 mm.)<br>360 mm./ Travel 100 mm. (30.9/31.6 mm.)<br>410 mm./ Travel 125 mm. (30.9/31.6 mm.) |
| Weight                                            | 605g/ 27.2 * 400 mm.<br>610g/ 30.9 * 410 mm.<br>(excluding cable set 90g.)                                                                                                                                                                   |
| Finish                                            | Polished Black<br>Sandblasted Black(27.2mm)                                                                                                                                                                                                  |
| Shaft finish                                      | Hard Anodized Black (30.9/31.6 mm.)<br>QPQ (27.2 mm.)                                                                                                                                                                                        |
| ★ stage 2 standard according to suspension system |                                                                                                                                                                                                                                              |

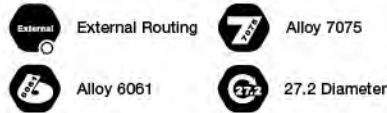

JD-YSP36

ISO MTB / Pat.

One piece 3D forged shaft 27.2 external routing dropper post

|              |                                                                             |
|--------------|-----------------------------------------------------------------------------|
| Material     | Alloy #7075-T651                                                            |
| Offset       | 0 mm.                                                                       |
| Dia.         | 27.2 mm.                                                                    |
| Length       | 305 mm./ Travel 70 mm.<br>350 mm./ Travel 90 mm.<br>395 mm./ Travel 110 mm. |
| Weight       | 525g/ 27.2 * 395 mm.<br>(excluding the cable set 90g.)                      |
| Finish       | Sandblasted Black.                                                          |
| Shaft finish | Hard Anodized Black                                                         |







## JD-YSP38J

ISO MTB / Pat.

One piece 3D forged shaft 27.2 internal routing dropper post

|              |                                                                             |
|--------------|-----------------------------------------------------------------------------|
| Material     | Alloy #7075-T651                                                            |
| Offset       | 0 mm.                                                                       |
| Dia.         | 27.2 mm.                                                                    |
| Length       | 315 mm./ Travel 70 mm.<br>377 mm./ Travel 90 mm.<br>405 mm./ Travel 110 mm. |
| Weight       | 490g/ 27.2 * 405 mm.<br>(excluding the cable set 90g.)                      |
| Finish       | Sandblasted Black                                                           |
| Shaft finish | Hard Anodized Black                                                         |



## JD-YSP20J

ISO MTB ★ / ROAD

Unique stealth road style dropper post featuring duo height adjustable, providing clean outlook for Roadies.

|               |                                    |
|---------------|------------------------------------|
| Material      | Alloy #7075-T651 & SAE4130         |
| Offset        | 20 mm.                             |
| Dia.          | 27.2 mm.                           |
| Adjust Height | 35 mm.                             |
| Travel        | 50 mm.                             |
| Length        | 365 mm.                            |
| Weight        | 495g<br>(excluding cable set 90g.) |
| Finish        | Polished Black                     |
| Shaft finish  | QPQ                                |

★ stage 2 standard according to suspension system




## JD-YSI01J

ISO MTB / Pat.

50 mm short travel and light weight dropper designed for road, gravel, adventure and touring application (Internal version)

|              |                                                                                                                                |
|--------------|--------------------------------------------------------------------------------------------------------------------------------|
| Material     | Alloy #7075-T651                                                                                                               |
| Offset       | 0 mm.                                                                                                                          |
| Dia.         | 27.2/30.9/31.6 mm.                                                                                                             |
| Travel       | 50 mm.                                                                                                                         |
| Length       | 350 mm./ 400 mm.                                                                                                               |
| Weight       | 475g/ 30.9 * 400 mm.<br>440g/ 30.9 * 350 mm.<br>430g/ 27.2 * 400 mm.<br>400g/ 27.2 * 350 mm.<br>(excluding the cable set 90g.) |
| Finish       | Polished Black                                                                                                                 |
| Shaft finish | Sandblasted Black(27.2mm)<br>Hard Anodized Black                                                                               |

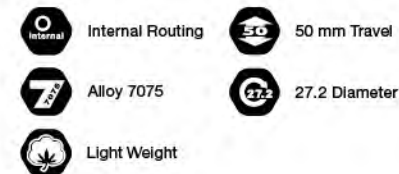


## JD-YSE01

ISO MTB / Pat.

50 mm short travel and light weight dropper designed for road, gravel, adventure and touring application (External version)

|              |                                                                                                                                |
|--------------|--------------------------------------------------------------------------------------------------------------------------------|
| Material     | Alloy #7075-T651                                                                                                               |
| Offset       | 0 mm.                                                                                                                          |
| Dia.         | 27.2/30.9/31.6 mm.                                                                                                             |
| Travel       | 50 mm.                                                                                                                         |
| Length       | 350 mm./ 400 mm.                                                                                                               |
| Weight       | 475g/ 30.9 * 400 mm.<br>440g/ 30.9 * 350 mm.<br>465g/ 27.2 * 400 mm.<br>435g/ 27.2 * 350 mm.<br>(excluding the cable set 90g.) |
| Finish       | Polished Black                                                                                                                 |
| Shaft finish | Sandblasted Black (27.2mm)<br>Hard Anodized Black                                                                              |

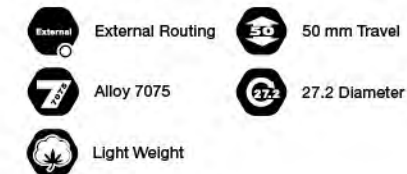





## YSI16

ISO MTB

Light weight dropper post suitable for XC, gravel, all road application

|              |                                                     |                             |
|--------------|-----------------------------------------------------|-----------------------------|
| Material     | Alloy #7075-T651(27.2)<br>Alloy #6066-T6(30.9&31.6) |                             |
| Offset       | 0 mm                                                |                             |
| Dia.         | 27.2/30.9/31.6                                      |                             |
| Length       | 27.2                                                | 30.9/31.6                   |
|              | 340 mm/ Travel 70 mm                                | 350 mm/ Travel 70 mm        |
|              | 390 mm/ Travel 70 mm                                | 350 mm/ Travel 100 mm       |
|              | 390 mm/ Travel 100 mm                               | 400 mm/ Travel 70 mm        |
|              |                                                     | 400 mm/ Travel 100 mm       |
| Weight       | 27.2                                                | 31.6                        |
|              | 382g* 340 mm/ Travel 70 mm                          | 439g* 350 mm/ Travel 70 mm  |
|              | 412g* 390 mm/ Travel 70 mm                          | 430g* 350 mm/ Travel 100 mm |
|              | 412g* 390 mm/ Travel 100 mm                         | 465g* 400 mm/ Travel 70 mm  |
|              | (excluding the cable set 90g)                       | 473g* 400 mm/ Travel 100 mm |
| Finish       | Polished Black                                      |                             |
| Shaft finish | Hard Anodized Black                                 |                             |



NEW



## JD-YSP01V

ISO MTB ★

AM bike adjustable seat post - Freely, fit the terrain you meet!  
The Pinocchio tool less height MICRO adjustable post offers a quick and easy lowering task

- \* Reliable and solid technology - Virtually No Play!
- \* Exquisite elegant and easy assembling w/low profile head design

|              |                                        |
|--------------|----------------------------------------|
| Material     | Alloy #7075-T651 & SAE4130(27.2 mm.)   |
| Offset       | Alloy #6061-T6(30.9/31.6 mm.)          |
| Dia.         | 15 mm.                                 |
| Length       | 27.2/30.9/31.6 mm.                     |
|              | 340 mm./ Travel 80 mm.(27.2 mm.)       |
|              | 390 mm./ Travel 100 mm.(27.2 mm.)      |
|              | 318 mm./ Travel 80 mm.(30.9/31.6 mm.)  |
|              | 361 mm./ Travel 100 mm.(30.9/31.6 mm.) |
|              | 402 mm./ Travel 120 mm.(30.9/31.6 mm.) |
| Weight       | 615g/ 30.9*400 mm.                     |
|              | 623g/ 27.2*390 mm.                     |
| Finish       | Polished Black                         |
|              | Sandblasted Black(27.2mm.)             |
| Shaft finish | Hard Anodized Black(30.9/31.6 mm.)     |
|              | QPQ(27.2 mm.)                          |

★ stage 2 standard according to suspension system



## JD-YSP50

ISO MTB

Entry level dropper post suitable for city, trekking, or cargo bikes; offering the ease to adjust saddle height and safer with feet on the ground while bike stop.

|              |                                        |
|--------------|----------------------------------------|
| Material     | Alloy #6061-T6                         |
| Offset       | 12 mm.                                 |
| Dia.         | 27.2/30.9/31.6 mm.                     |
| Length       | 350 mm./ Travel 40 mm.(27.2 mm.)       |
|              | 400 mm./ Travel 50 mm.(27.2 mm.)       |
|              | 375 mm./ Travel 100 mm.(30.9/31.6 mm.) |
|              | 403 mm./ Travel 120 mm.(30.9/31.6 mm.) |
|              | 472 mm./ Travel 150 mm.(30.9/31.6 mm.) |
|              | 518 mm./ Travel 170 mm.(30.9/31.6 mm.) |
| Weight       | 589g/ 27.2*400 mm.                     |
|              | 795g/ 31.6*518 mm.                     |
| Finish       | Polished Black                         |
|              | Sandblasted Black                      |
| Shaft finish | Hard Anodized Black                    |







**+RAD**  
TRAVEL ADJUST

DROPPER POST 10



## JD-YSI08

ISO MTB

NEW

Premium dropper post with shorter overall length and stack height, featuring air valve to adjust rebound speed and +RAD for travel adjust fitment

|               |                                                                                                                                     |
|---------------|-------------------------------------------------------------------------------------------------------------------------------------|
| Material      | Alloy #7075-T651                                                                                                                    |
| Function      | Control lever up & down                                                                                                             |
| Offset        | 0 mm.                                                                                                                               |
| Travel Adjust | 25 mm(5 mm/step)                                                                                                                    |
| Dia.          | 30.9/31.6/34.9 mm.                                                                                                                  |
| Length        | 387 mm./ Travel 125 mm.<br>442 mm./ Travel 150 mm.<br>482 mm./ Travel 170 mm.<br>542 mm./ Travel 200 mm.<br>612 mm./ Travel 230 mm. |
| Weight        | 570g/ 30.9 * 540 mm.<br>500g/ 30.9 * 440 mm.<br>645g/ 34.9 * 540 mm.<br>(excluding the cable set 90g)                               |
| Finish        | Polished Black                                                                                                                      |
| Shaft finish  | Hard Anodized Back                                                                                                                  |



Internal Routing



Up to 230 mm Travel



Alloy 7075



Travel Adjust



Pressure Adjustable



## JD-YSI20

ISO MTB

NEW

Long travel 27.2 dropper post with travel adjust feature

|               |                                                                                                                                   |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------|
| Material      | Alloy #7075-T651                                                                                                                  |
| Offset        | 0 mm.                                                                                                                             |
| Dia.          | 27.2 mm                                                                                                                           |
| Travel Adjust | 25 mm(5 mm/step)                                                                                                                  |
| Length        | 400 mm/ Travel 100 mm.<br>450 mm/ Travel 125 mm.<br>440g/ 27.2 * 450 mm.<br>410g/ 27.2 * 400 mm.<br>(excluding the cable set 90g) |
| Weight        |                                                                                                                                   |
| Finish        | Polished Black                                                                                                                    |
| Shaft finish  | Hard Anodized Black                                                                                                               |



Internal Routing



27.2 Diameter



Alloy 7075



Up to 125 mm Travel



Travel Adjust



DROPPER POST 11



JD-YSI05J

ISO MTB / Pat.

Adjustable Travel Dropper Post with patented bushing, allowing adjustment for better fitment to different rider's height

|               |                                                                                                                                                     |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| Material      | Alloy #7075-T651                                                                                                                                    |
| Travel Adjust | 30 mm (5 mm/step)                                                                                                                                   |
| Offset        | 0 mm.                                                                                                                                               |
| Dia.          | 30.9/31.6/34.9 mm.                                                                                                                                  |
| Length        | 409 mm./ Travel 125 mm. to 95 mm.<br>459 mm./ Travel 150 mm. to 120 mm.<br>499 mm./ Travel 170 mm. to 140 mm.<br>559 mm./ Travel 200 mm. to 170 mm. |
| Weight        | 575g/ 30.9 * 459 mm.<br>595g/ 31.6 * 459 mm.<br>(excluding the cable set 90g.)                                                                      |
| Finish        | Sand Blasted Black                                                                                                                                  |
| Shaft finish  | Hard Anodized Black                                                                                                                                 |

 Internal Routing

 34.9 Diameter

 Alloy 7075

 +RAD Travel Adjust



JD-YSI13J

ISO MTB / Pat.

Adjustable Travel Dropper Post with patented bushing, allowing adjustment for better fitment to different rider's height (Valved cartridge version)

|               |                                                                                                                                                     |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| Material      | Alloy #7075-T651                                                                                                                                    |
| Travel Adjust | 30 mm (5 mm/step)                                                                                                                                   |
| Offset        | 0 mm.                                                                                                                                               |
| Dia.          | 30.9/ 31.6 mm.                                                                                                                                      |
| Length        | 408 mm./ Travel 125 mm. to 95 mm.<br>458 mm./ Travel 150 mm. to 120 mm.<br>498 mm./ Travel 170 mm. to 140 mm.<br>558 mm./ Travel 200 mm. to 170 mm. |
| Weight        | 535g/ 30.9 * 458 mm.<br>555g/ 31.6 * 458 mm.<br>(excluding the cable set 90g.)                                                                      |
| Finish        | Sand Blasted Black                                                                                                                                  |
| Shaft finish  | Hard Anodized Black                                                                                                                                 |

 Internal Routing

 PSI Pressure Adjustable

 Alloy 7075

 +RAD Travel Adjust



YSI15

ISO MTB

Award winning integrated seat clamp dropper post without the need for custom frame, and infinite travel adjust for wide range of rider's fitment

|              |                                                                                                                                                                                                                                                                                                                                                                      |
|--------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Material     | Alloy #7075-T651                                                                                                                                                                                                                                                                                                                                                     |
| Offset       | 0 mm.                                                                                                                                                                                                                                                                                                                                                                |
| Dia.         | 30.9/Seat Clamp Dia. 34.9 mm<br>31.6/Seat Clamp Dia. 34.9 mm<br>34.9/Seat Clamp Dia. 38.6 or 38.9 mm                                                                                                                                                                                                                                                                 |
| Length       | 660 mm./ Travel 225 mm.<br>602 mm./ Travel 200 mm.<br>547 mm./ Travel 175 mm.<br>492 mm./ Travel 150 mm.<br>432 mm./ Travel 125 mm.                                                                                                                                                                                                                                  |
| Weight       | 808g/ 31.6 * 660 mm./ Travel 225 mm.<br>785g/ 30.9 * 660 mm./ Travel 225 mm.<br>745g/ 31.6 * 602 mm./ Travel 200 mm.<br>726g/ 30.9 * 602 mm./ Travel 200 mm.<br>702g/ 31.6 * 547 mm./ Travel 175 mm.<br>682g/ 30.9 * 547 mm./ Travel 175 mm.<br>890g/ 34.9 * 660 mm./ Travel 225 mm.<br>826g/ 34.9 * 602 mm./ Travel 200 mm.<br>773g/ 31.6 * 547 mm./ Travel 175 mm. |
| Finish       | Polished Black                                                                                                                                                                                                                                                                                                                                                       |
| Shaft finish | Hard Anodized Black                                                                                                                                                                                                                                                                                                                                                  |

 Internal Routing

 Up to 225 mm Travel

 Alloy 7075

 iRAD Infinite Travel Adjust



NEW












## JD-YSP28

ISO MTB ★ / Pat.

Suspension+Dropper; Combining the comfort of suspension post and the safety of dropper post, suitable for a broad range of bikes. With the unique air pressure adjustable, suspension stiffness can be adjusted easily to fit with different riders' weight and preferences. (Internal version)

|              |                                                                                                                                                                                                                                                                                                                                |
|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Material     | Alloy #7075-T651 & SAE4130 (27.2 mm.)<br>Alloy #7075-T651 (30.9/31.6 mm.)                                                                                                                                                                                                                                                      |
| Offset       | 0 mm.                                                                                                                                                                                                                                                                                                                          |
| Dia.         | 27.2/30.9/31.6 mm.                                                                                                                                                                                                                                                                                                             |
| Damp Ttravel | 30~70 mm.                                                                                                                                                                                                                                                                                                                      |
| Length       | 340 mm./ Travel 80 mm(27.2 mm.)<br>390 mm./ Travel 100 mm(27.2 mm.)<br>322 mm./ Travel 80 mm (30.9/31.6 mm.)<br>362 mm./ Travel 100 mm (30.9/31.6 mm.)<br>402 mm./ Travel 120 mm (30.9/31.6 mm.)<br>462 mm./ Travel 150 mm (30.9/31.6 mm.)<br>502 mm./ Travel 170 mm (30.9/31.6 mm.)<br>562 mm./ Travel 200 mm (30.9/31.6 mm.) |
| Weight       | 590g/ 30.9 * 403 mm.<br>600g/ 27.2 * 390 mm.<br>(excluding the cable set 90g)                                                                                                                                                                                                                                                  |
| Finish       | Polished Black<br>Sandblasted Black (27.2 mm.)<br>Hard Anodized Black (30.9/31.6 mm.)<br>QPQ (27.2 mm.)                                                                                                                                                                                                                        |
| Shaft finish |                                                                                                                                                                                                                                                                                                                                |

★ stage 2 standard according to suspension system

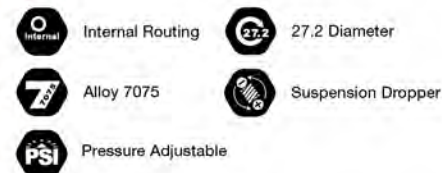

## JD-YSP30

ISO MTB ★ / Pat.

Suspension + Dropper + Air insert External routing version  
Suspension adjustable by inserting air according to pressure and user performance

|              |                                                                                                                                                                                                                            |
|--------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Material     | Alloy #7075-T651 & SAE4130 (27.2 mm.)<br>Alloy #7075-T651 (30.9/31.6 mm.)                                                                                                                                                  |
| Offset       | 0 mm.                                                                                                                                                                                                                      |
| Dia.         | 27.2/30.9/31.6 mm.                                                                                                                                                                                                         |
| Damp Travel  | 30~70 mm.                                                                                                                                                                                                                  |
| Length       | 380 mm./ Travel 100 mm (27.2 mm.)<br>352 mm./ Travel 100 mm (30.9/31.6 mm.)<br>392 mm./ Travel 120 mm(30.9/31.6 mm.)<br>610g/ 30.9 * 392 mm (30.9 mm.)<br>620g/ 27.2 * 380 mm (27.2 mm.)<br>(excluding the cable set 90g.) |
| Weight       |                                                                                                                                                                                                                            |
| Finish       | Polished Black<br>Sandblasted Black (27.2 mm.)<br>Hard Anodized Black (30.9/31.6 mm.)<br>QPQ (27.2 mm.)                                                                                                                    |
| Shaft finish |                                                                                                                                                                                                                            |

★ stage 2 standard according to suspension system




## JD-YSP16J

ISO MTB ★ / Pat.

A good balance of comfort and safe ride by combining suspension function with saddle height adjustable.

|              |                                                                                                         |
|--------------|---------------------------------------------------------------------------------------------------------|
| Material     | Alloy #7075-T651 & SAE4130 (27.2 mm.)<br>Alloy #6061-T6 (30.9/31.6 mm.)                                 |
| Offset       | 10 mm.                                                                                                  |
| Dia.         | 27.2/30.9/31.6 mm.                                                                                      |
| Damp Travel  | 40 mm.                                                                                                  |
| Length       | 377 mm./ Travel 50 mm.<br>417 mm./ Travel 70 mm.                                                        |
| Weight       | 535g/ 27.2 * 375 mm.<br>(excluding cable set 90g.)                                                      |
| Finish       | Polished Black<br>Sandblasted Black (27.2 mm.)<br>Hard Anodized Black (30.9/31.6 mm.)<br>QPQ (27.2 mm.) |
| Shaft finish |                                                                                                         |

★ stage 1,2 standard according to suspension system

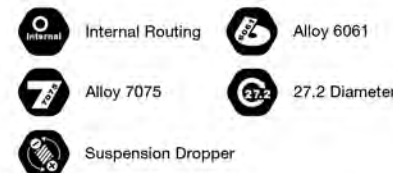

## YSI18

ISO MTB

Combination of dropper post and parallelogram suspension that offer the best blend of both worlds. Changeable elastomer stiffness to fit different needs and rider's weight.

|              |                                                                                                                                                    |
|--------------|----------------------------------------------------------------------------------------------------------------------------------------------------|
| Material     | Alloy #7075-T651                                                                                                                                   |
| Offset       | 11 mm.                                                                                                                                             |
| Dia.         | 27.2/30.9/31.6 mm                                                                                                                                  |
| Length       | 355 mm./ Travel 70 mm. (27.2)<br>400 mm./ Travel 90 mm. (27.2)<br>347 mm./ Travel 70 mm. (30.9/31.6 mm.)<br>413 mm./ Travel 90 mm. (30.9/31.6 mm.) |
| Weight       | 630g/ 27.2*355 mm.<br>680g/ 27.2*400 mm.<br>599g/ 31.6 * 347 mm.<br>660g/ 31.6 * 413 mm.<br>(excluding the cable set 90g.)                         |
| Finish       | Polished Black                                                                                                                                     |
| Shaft finish | QPQ (27.2 mm.)<br>Hard Anodized Black (30.9/31.6 mm.)                                                                                              |
| Elastomer    | #50/#70/#90★                                                                                                                                       |


★ 90 is factory standard #50/#70 are optionals





## REVERSED CABLE LEVER OPTIONS


J 22.2 / 24 / 31.8 Clamp



J 22.2 Clamp



J 24 Clamp for drop bar



J 31.8 Clamp for drop bar

JL 22.2 Clamp 1x shifter



JL 22.2 Clamp



JL2(I-Spec II mount)

QL 22.2 Clamp 1x shifter



QL 22.2 Clamp

## MULTI POSITION 1X LEVER



FL 22.2 Clamp



FL2(I-Spec II mount)

## BEARING 1X LEVER



GL 22.2 Clamp



GL2(I-Spec II mount)

## DROP BAR LEVER



DL 24 Clamp

