

The background is a light gray with several vertical bars of varying heights and colors (white, yellow, and gray) scattered across it. A faint, grayscale image of a person is visible in the lower-middle section, partially obscured by the bars.

TEKTRO

2024 OE COLLECTION





03 / Drivetrain



09 / Disc Brake




28 / Junior Brake




29 / Recreation




31 / E-bike



40 / Road




42 / Cyclocross



43 / Accessories



49 / Distributor Warranty







DRIVETRAIN COLLECTION

SL-M5000-10R

SL-M5100-11R

RD-T5100-S

RD-M5100-L

CS-M5000-10

CS-M5100-11

SL- M330-8R

SL- M350-9R

RD-M350

RD-T350

CS-M350

CS-M330

NEW

SL-M5000-10R



SL-M5100-11R



Specification


Model No.	SL-M5000-10	SL-M5100-11
Speeds	10	11
Weight	105g	105g
Maximum upshift	3	3

Feature


Clean cockpit cable route
Tool-free straight lace cable changes
Easy to install and maintain
Clamp integrated design

NEW

RD-T5100-S

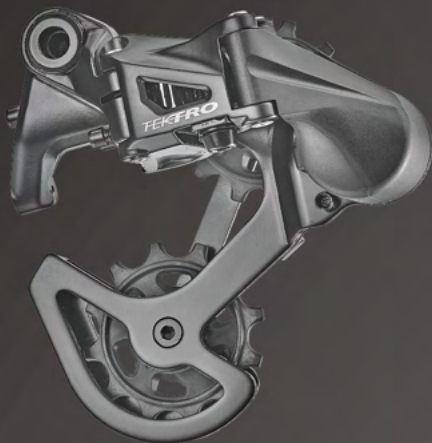

RD-M5100-L

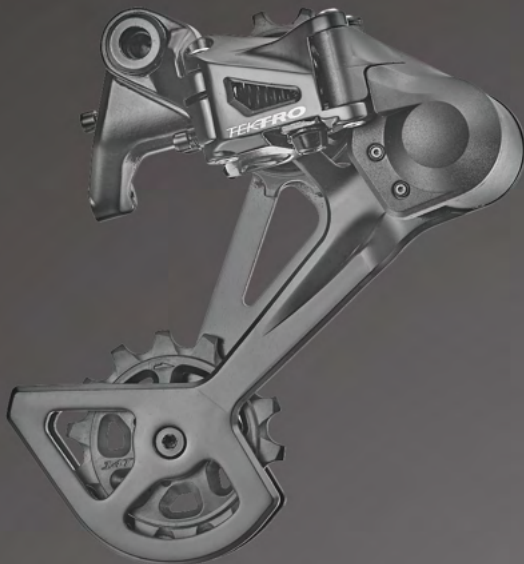

Specification

Speeds	10
Capacity	Max 42T
Weight	330g
Chainline	47.5 – 52mm
Chain Compatibility	10 Speed

Feature

Short cage design for maximum ground & tire clearance 20" Wheel compatible
Robust horizontal parallelogram construction
Easy to adjust and maintain


Specification

Speeds	10/11
Capacity	Max 50T
Weight	385g
Chainline	47.5 – 52mm
Chain Compatibility	10/11 Speed

Feature

Durable ratchet style clutch
Robust horizontal parallelogram construction
Easy to adjust and maintain

NEW



First 2 cogs are replaceable

CS-M5100-11

Specification

Speeds	11
Range	11-50
Combination	11-13-15-18-21-24-28-32-36-42-50
Weight	735g
Compatibility	11s chain

Feature

All steel construction
Wide gear ratio
First 2 cogs are replaceable



First 2 cogs are replaceable

CS-M5000-10

Specification

Speeds	10
Range	11-42 , 11-50
Combination	11-13-15-18-21-24-28-32-36-42 11-13-16-20-24-28-32-36-42-50
Weight	735g
Compatibility	10s chain

COMPATIBILITY CHART

Category	MTB / Trekking / City / Urban		Cargo / Folding / Junior
Derailleur	RD-M5100-L Derailleur w/ clutch		RD-T5100-S w/o clutch
Shifter	SL-M5100-11R (11S)	SL-M5000-10R (10S)	
Cassette	CS-M5100-11 (11-50)	CS-M5000-10 (11-50)	CS-M5000-10 (11-42)
Chain	11 Speed	10 Speed	

Chain Recommendation 10 speed: 1/2"x11/128"
11 speed: 1/2"x11/128"

SL- M330-8R



Specification

Speeds	8(SL-M330-8R)
	9(SL-M350-9R)
Weight	105g
Maximum upshift	3

SL- M350-9R



Feature

Cleaner cable routing
Tool-free straight lace cable changes
Easy to install and maintain

RD-M350



Specification

Speeds	8/9
Capacity	Max 46T
Weight	361g(M350) / 344g(T350)

RD-T350



Feature

Durable ratchet style clutch (only on RD-M350)
Robust horizontal parallelogram construction
Easy to adjust and maintain



First 3 cogs are replaceable


CS-M330

Specification

Speeds	8
Range	11-42
Combination	11-13-16-20-24-28-34-42
Weight	506g
Compatibility	8s chain

Feature

1.8mm thickness cogs
All steel construction
Wide gear ratio
First 3 cogs are replaceable

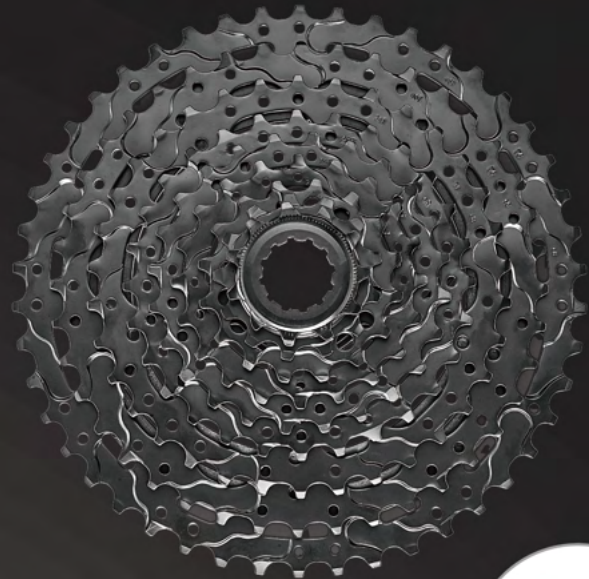

First 3 cogs are replaceable

CS-M350

Specification

Speeds	9
Range	11-46
Combination	11-13-16-20-24-28-34-40-46
Weight	545g
Compatibility	9s chain


Feature

1.8mm thickness cogs
All steel construction
Wide gear ratio
First 3 cogs are replaceable

COMPATIBILITY CHART

Category	E-MTB / E-Trekking		E-City / E-Urban	
Derailleur	RD-M350 w/ clutch derailleur		RD-T350 w/o clutch derailleur	
Shifter	SL-M330-8R	SL-M350-9R	SL-M330-8R	SL-M350-9R
Cassette	CS-M330(11-42)	CS-M350(11-46)	CS-M330(11-42)	CS-M350(11-46)
Chain	8 Speed	9 Speed	8 Speed	9 Speed

Chain Recommendation 8 Speed: 1/2"x3/32"
9 Speed : 1/2"x11/128"

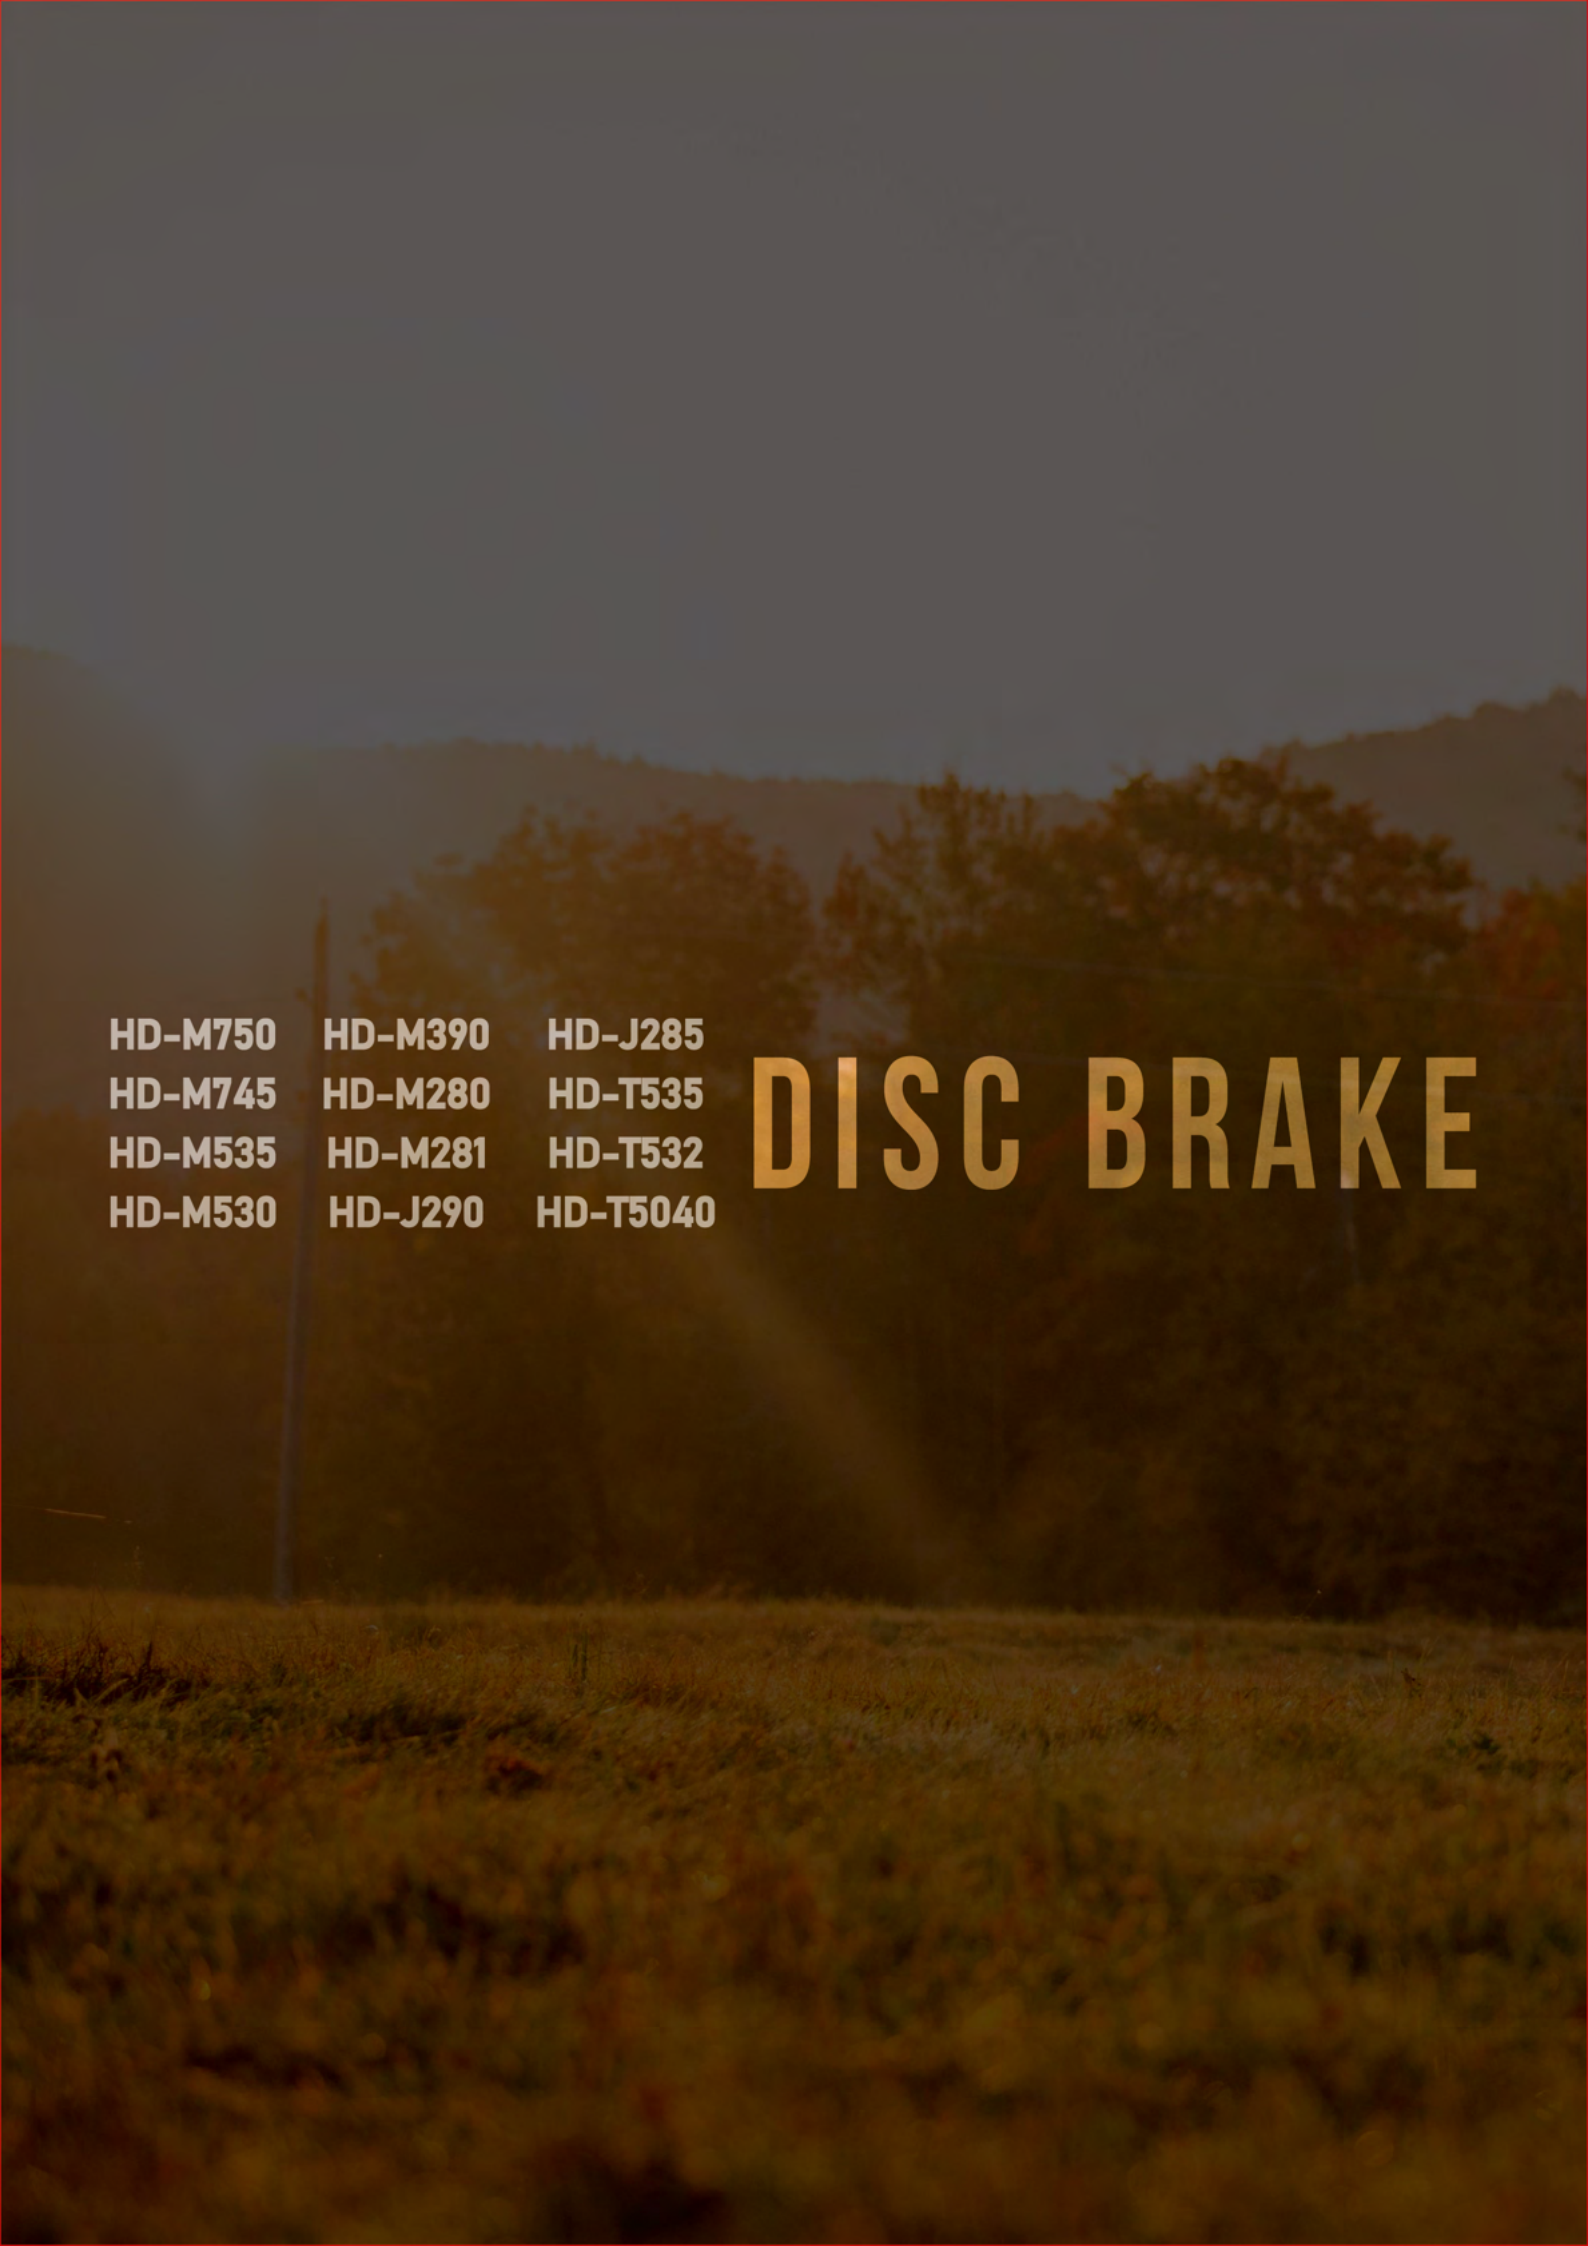

HD-M750	HD-M390	HD-J285
HD-M745	HD-M280	HD-T535
HD-M535	HD-M281	HD-T532
HD-M530	HD-J290	HD-T5040

DISC BRAKE

A full-page background image showing two mountain bikers on a trail during sunset. The scene is bathed in warm, golden light. The biker on the left is a woman wearing a blue long-sleeved shirt, black shorts, and a black helmet. She is riding a blue and black mountain bike. The biker on the right is a man wearing a dark long-sleeved shirt, light-colored shorts, and a black helmet. He is riding a black and white mountain bike. The trail is surrounded by trees with autumn foliage in shades of orange, red, and yellow. The sky is a soft, hazy orange.

COLLECTION

HD-T3020

HD-T280

HD-R3020

HD-R285

MD-U510

MD-C510

MD-C550

MD-C400

MD-U310F

MD-U310R

MD-C310F

MD-C310R

HD-M750

TEKTRO
DRIFTF

THICKER ROTOR, RESIN PAD
BE POWERFUL & DURABLE ON E-MTB!



SYSTEM

Open system, 4 piston
Powerful and controllable braking
Recommend for e-bike with center motor
Easy installation, adjustment and maintenance

WEIGHT

Front - 314 grams / Rear - 334 grams
(Exclude rotor, adapter & mounting bolts)

ROTOR

2.3mm thickness
6 Bolt : TR-17 / TR-54
Center Lock : TR-45 / TR-45A

CALIPER

4 Piston, Forged aluminum body
Free angle of hose connector for varied frames
Easy pads replacement from top
Finish : Black

LEVER

Forged aluminum lever & cast bracket
I-Spec II® & Matchmaker® compatible
Reach adjustment
Two-piece hinged clamp
2 finger blade
Finish : Black

PADS

Overall balance resin pad
Upload replacement

4PISTON



Resin Pad




Q10RS



TR-54



TR-17

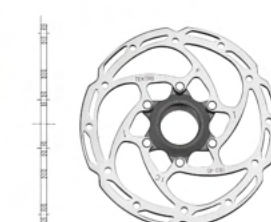

2.3mm TR-45 / TR-45A

I-SPEC II® Narrow
HD-M750



HD-M745

TEKTRO
DRAGON**SYSTEM**

Open system, 4 piston
Powerful and controllable braking
Easy installation, adjustment and maintenance

WEIGHT

Front - 251 grams / Rear - 271 grams
(Exclude rotor, adapter & mounting bolts)

ROTOR

1.8mm thickness

CALIPER

4 Piston, Forged Aluminum body
Easy pad replacement from top
Finish : Black

LEVER


Forged aluminum lever & cast bracket
I-Spec II® & Matchmaker® compatible
Reach adjustment
Two-piece hinged clamp
2 finger blade
Finish : Black

PADS

Overall balance resin pad
Upload replacement

4PISTON

Q10YS



TR-53



TR-35 / TR-35A

I-SPEC II® Narrow
HD-M745

HD-M535

TEKTRO
Gemini^{SL}



SYSTEM

Open system, 4 piston
Powerful and controllable braking
Recommend for e-bike with center motor
Easy installation, adjustment and maintenance

WEIGHT

Front - 300 grams / Rear - 320 grams
(Exclude rotor, adapter & mounting bolts)

ROTOR

2.3mm thickness
6 Bolt : TR-17 / TR-54
Center Lock : TR-45 / TR-45A

CALIPER

New 4 piston forged body
New universal oil route
Ø5.0mm oil hose

LEVER

Forged aluminum lever & cast bracket
Reach adjustment
One-piece clamp
2 finger blade with dimple design
Finish : Black

PADS

5mm pad - Q13RS
Durable and performance resin pad
Upgrade replacement



4PISTON



Q13RS




TR-54



TR-17



2.3mm



TR-45 / TR-45A

HD-M530

TEKTRO
Gemini**SYSTEM**

Open system, F4 x R2 piston
 Powerful and controllable braking
 Recommend for e-bike with center motor
 Easy installation, adjustment and maintenance

WEIGHT

Front - 300 grams / Rear - 320 grams
 (Exclude rotor, adapter & mounting bolts)

ROTOR

2.3mm thickness
 6 Bolt : TR-17 / TR-54
 Center Lock : TR-45 / TR-45A

CALIPER

New forged aluminum body
Front - 4 piston, Rear - 2 piston
 New universal oil route
 Ø5.0mm oil hose

LEVER

Forged aluminum lever & cast bracket
 Reach adjustment
 One-piece clamp
 2 finger blade with dimple design
 Finish : Black

PADS

5mm pad - Front Q13RS / Rear P21.11
 Durable and performance resin pad
 Upload replacement



Front



Rear

4PISTON x 2PISTON

Front : Q13RS



Rear : P21.11



TR-54



TR-17



2.3mm TR-45 / TR-45A



HD-M390



SYSTEM

Open system, 2 piston
Easy installation,
adjustment and maintenance

WEIGHT

Front - 307 grams / Rear - 319 grams
(Exclude rotor, adapter & mounting bolts)

ROTOR

2.3mm thickness
6 bolt : TR17 / 54
Center lock : TR-45 / TR-45A

CALIPER

Forged aluminum body
Post mount, 2 piston
With 2.3mm disc rotor & 5mm pad
Finish : Black

LEVER

Aluminum lever / Cast bracket
One-piece clamp
2 finger blade
Finish : Black

PADS

5mm thickness - E11.11
Easy replacement

HD-M280 / M281



SYSTEM

Open system, 2 piston
Easy installation,
adjustment and maintenance

WEIGHT

Front - 287 grams / Rear - 307 grams
(Exclude rotor, adapter & mounting bolts)

ROTOR

1.8mm thickness

CALIPER

Forged aluminum body
Finish : Black

LEVER

Aluminum lever / Cast bracket
HD-M275 : Reach 86 - 90 mm
HD-M276 : Reach 81 - 85 mm
One-piece clamp
2 finger blade
Finish : Black

PADS

Low noise resin pad
Easy replacement

HD-J290

Junior

**SYSTEM**

Open system, 2 piston

Flat mount, Low profile

For use with thumb or twist shifters

WEIGHTFront - 294 grams / Rear - 314 grams
(Exclude rotor, adapter & mounting bolts)**ROTOR**

1.8mm thickness

CALIPER

Forged aluminum body

Flat mount caliper

Finish : Black

LEVER

Aluminum lever / Cast aluminum bracket

Short lever reach / youth bike

2 finger lever

One- piece clamp

Lever reach: 75-77mm

Finish : Black

PADS

Low noise resin pad

Easy replacement

HD-J285

Junior

**SYSTEM**

Open system, 2 piston

Easy installation,

adjustment and maintenance
For use with thumb or twist shifters**WEIGHT**Front - 286 grams / Rear - 306 grams
(Exclude rotor, adapter & mounting bolts)**ROTOR**

1.8mm thickness

CALIPER

Forged aluminum body

Finish : Black

LEVER

Aluminum lever / Cast aluminum bracket

Short lever reach / youth bike

2 finger lever

One-piece clamp

Lever reach: 75-77mm

Finish : Black

PADS

Low noise resin pad

Easy replacement

HD-T535



SYSTEM

Open system, 4 piston
Powerful and controllable braking
Recommend for e-bike with center motor
Easy installation, adjustment and maintenance

WEIGHT

Front - 303 grams / Rear - 323 grams
(Exclude rotor, adapter & mounting bolts)

ROTOR

2.3mm thickness
6 Bolt : TR-17 / TR-54
Center Lock : TR-45 / TR-45A

CALIPER

New 4 piston forged body
New universal oil route
Ø5.0mm oil hose

LEVER

Forged aluminum lever & cast bracket
Reach adjustment
One-piece clamp
3 finger blade with dimple design
Finish : Black

PADS

5mm pad - Q13RS
Durable and performance resin pad
Upload replacement



Q13RS



TR-54



TR-17



2.3mm



TR-45 / TR-45A

HD-T532

**SYSTEM**

Open system, F4 x R2 piston
Powerful and controllable braking
Recommend for e-bike with center motor
Easy installation, adjustment and maintenance

WEIGHT

Front - 303 grams / Rear - 323 grams
(Exclude rotor, adapter & mounting bolts)

ROTOR

2.3mm thickness

6 Bolt : TR-17 / TR-54

Center Lock : TR-45 / TR-45A

CALIPER

New forged aluminum body

Front - 4 piston, Rear - 2 piston

New universal oil route

Ø5.0mm oil hose

LEVER

Forged aluminum lever & cast bracket

Reach adjustment

One-piece clamp

3 finger blade with dimple design

Finish : Black

PADS

5mm pad - Front Q13RS / Rear P21.11

Durable and performance resin pad

Upload replacement



Front : Q13RS

Rear : P21.11

TR-54

TR-17

2.3mm TR-45 / TR-45A

HD-T5040



SYSTEM

Open system, 4 piston

Clean cockpit lever design

Easy installation, adjustment and maintenance

WEIGHT

Front - 310 grams / Rear - 324 grams

(Exclude rotor, adapter & mounting bolts)

ROTOR

2.3mm thickness

6 bolt : TR17 / TR-54

Center lock : TR-45 / TR-45A

CALIPER

Forged aluminum body

Post mount, 4 piston

Ø5.0mm oil hose

Finish : Black

LEVER

Aluminum lever & Cast bracket

One-piece clamp

3 finger blade

Finish : Black

PADS

5mm pad - Q13RS

Durable and performance resin pad

Upgrade replacement



4PISTON



Q13RS



TR-54



TR-17



2.3mm



TR-45 / TR-45A

HD-T3020



SYSTEM

Open system, 2 piston
Easy installation, adjustment and maintenance
Clean cockpit lever design

WEIGHT

Front - 315 grams / Rear - 327 grams
(Exclude rotor, adapter & mounting bolts)

ROTOR

1.8mm thickness
6-bolt : TR-52
Center lock : TR-35

CALIPER

Forged aluminum body
Post mount, 2 piston
Ø5.0mm oil hose
Finish : Black

LEVER

Aluminum lever / Cast bracket
One-piece clamp
3 finger lever blade
Finish : Black

PADS

Low noise resin pad
Easy replacement

HD-T280 / T281



SYSTEM

Open system, 2 piston
Easy installation, adjustment and maintenance

WEIGHT

Front - 300 grams / Rear - 320 grams
(Exclude rotor, adapter & mounting bolts)

ROTOR

1.8mm thickness

CALIPER

Forged aluminum body
Ø5.0mm oil hose
Finish : Black

LEVER

Aluminum lever / Cast bracket
HD-T280 : Reach 86 - 90 mm
HD-T281 : Reach 81 - 85 mm
One-piece clamp
3 finger blade
Finish : Black

PADS

Low noise resin pad
Easy replacement

HD-R3020



FLATMOUNT ROAD – URBAN – LIFETYLE

SYSTEM

Open system, 2 piston

Clean cockpit lever design

Flat mount, Low profile

Easy instalation, adjustment and maintenance

WEIGHT

Front - 307 grams / Rear - 319 grams
(Exclude rotor, adapter & mounting bolts)

ROTOR

1.8mm thickness

6-bolt : TR-52

Center lock : TR-35

CALIPER

Forged aluminum body

Flat mount, 2 piston

Ø5.0mm oil hose

Finish : Black

LEVER

Aluminum lever & Cast bracket

One-piece clamp

3 finger blade

Finish : Black

PADS

Low noise resin pad

Easy replacement

HD-R285 / R286



FLATMOUNT ROAD – URBAN – LIFETYLE

SYSTEM

Open system, 2 piston

Flat mount, Low profile

Easy installation,
adjustment and maintenance

WEIGHT

Front - 287 grams / Rear - 307 grams
(Exclude rotor, adapter & mounting bolts)

ROTOR

1.8mm thickness

CALIPER

Forged aluminum body

Flat mount, 2 piston

Ø5.0mm oil hose

Finish : Black

LEVER

Aluminum lever & Cast bracket

HD-R285: Reach 88 mm

HD-R286: Reach 83 mm

One-piece clamp

3 finger blade

Finish : Black

PADS

Low noise resin pad

Easy replacement

Hydraulic Disc Product Line Up

Model NO.	System	Lever	Ø Oil hose	T: 2.3mm Rotor	5mm Pad	others
HD-M750	4 piston	2 finger	Ø5.5mm	V	-	I-Spec II®compatible
HD-M745	4 piston	2 finger	Ø5.5mm	-	-	I-Spec II®compatible
HD-M535	4 piston	2 finger	Ø5.0mm	V	V	-
HD-M530	F4 x R2 piston	2 finger	Ø5.0mm	V	V	-
NEW HD-M390	2 piston	2 finger	Ø5.5mm	V	V	-
HD-M280	2 piston	2 finger	Ø5.0mm	-	-	-
HD-M281	2 piston	2 finger	Ø5.0mm	-	-	Short reach lever
HD-M275	2 piston	2 finger	Ø5.5mm	-	-	-
HD-M276	2 piston	2 finger	Ø5.5mm	-	-	Short reach lever
HD-J290	2 piston	2 finger	Ø5.5mm	-	-	Junior bike, Flat mount
HD-J285	2 piston	2 finger	Ø5.5mm	-	-	Junior bike
HD-T535	4 piston	3 finger	Ø5.0mm	V	V	-
HD-T532	F4 x R2 piston	3 finger	Ø5.0mm	V	V	-
NEW HD-T5040	4 piston	3 finger	Ø5.0mm	V	V	-
NEW HD-T3020	2 piston	3 finger	Ø5.0mm	-	-	-
HD-T280	2 piston	3 finger	Ø5.0mm	-	-	-
HD-T281	2 piston	3 finger	Ø5.0mm	-	-	Short reach lever
HD-T275	2 piston	3 finger	Ø5.5mm	-	-	-
HD-T276	2 piston	3 finger	Ø5.5mm	-	-	Short reach lever
NEW HD-R3020	2 piston	3 finger	Ø5.0mm	-	-	Flat mount
HD-R285	2 piston	3 finger	Ø5.0mm	-	-	Flat mount
HD-R286	2 piston	3 finger	Ø5.0mm	-	-	Flat mount / Short reach lever
HD-E350	2 piston	3 finger	Ø5.5mm	-	-	Power sensor
HD-E745	4 piston	ball-end 4 finger	#50 Ø5.5mm	V	V	Power sensor/Twin caliper/Parking lock
HD-T745	4 piston	ball-end 4 finger	#50 Ø5.5mm	V	V	Twin caliper/Parking lock
HD-E741	4 piston	ball-end 4 finger	#50 Ø5.5mm	V	V	Power sensor/Parking lock
HD-T741	4 piston	ball-end 4 finger	#50 Ø5.5mm	V	V	Parking lock
HD-E740	4 piston	ball-end 4 finger	#50 Ø5.5mm	V	V	Power sensor
HD-T740	4 piston	ball-end 4 finger	#50 Ø5.5mm	V	V	-
HD-T737	4 piston	3 finger	Ø5.5mm	V	V	-
HD-E730	4 piston	ball-end 4 finger	Ø5.5mm	V	-	Power sensor
NEW HD-E545	2 piston	3 finger	#50 Ø5.5mm	V	V	Twin caliper / Power sensor
NEW HD-T545	2 piston	3 finger	#50 Ø5.5mm	V	V	Twin caliper
NEW HD-E540	2 piston	3 finger	#50 Ø5.5mm	V	V	Power sensor
NEW HD-T540	2 piston	3 finger	#50 Ø5.5mm	V	V	-

Mechanical Disc Brake

Model NO.	Caliper	Lever Ratio	others
MD-M280	Post mount	Linear pull	-
MD-U510	Flat mount	Linear pull	-
MD-U310F	Flat mount	Linear pull	Front 160mm rotor
MD-U310R	Flat mount	Linear pull	Rear 160mm rotor
MD-C550	Flat mount	Road lever ratio	Dual piston
MD-C400	Post mount	Road lever ratio	-
MD-C510	Flat mount	Road lever ratio	-
MD-C310F	Flat mount	Road lever ratio	Front 160mm rotor
MD-C310R	Flat mount	Road lever ratio	Rear 160mm rotor

MD-U5 10 [CN]

FLAT MOUNT



LINEAR PULL BRAKE LEVER RATIO COMMUTER – URBAN – LIFESTYLE

SYSTEM

Cable actuated mechanical disc brake
Flat mount, Low profile
Actuated with linear pull brake lever

WEIGHT

156 grams / wheel
(Exclude rotor, adapter & mounting bolts)

ROTOR

1.8mm thickness

CALIPER

Flat mount caliper
Pad adjustment
Automatic pad angle adjustment via floating plates
Finish : Black only

PADS

Low noise resin pad
Easy replacement

MD-C5 10 [CN]

FLAT MOUNT



ROAD DROP BAR LEVER RATIO ROAD – URBAN – LIFESTYLE

SYSTEM

Cable actuated mechanical disc brake
Flat mount, Low profile
Actuated with road drop bar lever ratio

WEIGHT

156 grams / wheel
(Exclude rotor, adapter & mounting bolts)

ROTOR

1.8mm thickness

CALIPER

Flat mount caliper
Pad adjustment
Automatic pad angle adjustment via floating plates
Finish : Black only

PADS

Low noise resin pad
Easy replacement

MD-C550**DUAL PISTON****FLAT MOUNT
ROAD DROP BAR LEVER RATIO****SYSTEM**

Dual Piston cable actuated

Mechanical disc brake

Flat Mount , Low profile

Actuated with road drop bar lever ratio

WEIGHT

155 grams / wheel

(Exclude rotor, adapter & mounting bolts)

ROTOR

1.8mm thickness

CALIPER

Flat mount, aluminum caliper

Independent pad adjustment

Finish : Black only

PADS

Overall balance resin pad

Easy replacement

MD-C400 [CN]**TEKTRO
MIRA****SYSTEM**

Cable actuated mechanical disc brake

Actuated with road drop bar lever ratio

WEIGHT

162 grams / wheel

(Exclude rotor, adapter & mounting bolts)

ROTOR

1.8mm thickness

CALIPER

Single-piece aluminum body

Automatic caliper centering (A.C.C)

Pad adjustment

Automatic pad angle adjustment

via floating plates

Finish : Black

PADS

Resin pad

Easy replacement

MD-U310F [CN]

FLAT MOUNT



**LINEAR PULL BRAKE LEVER RATIO
COMMUTER – URBAN – LIFETYLE**

SYSTEM
Cable actuated mechanical disc brake
Actuated with linear pull brake lever
Flat mount Ø160mm rotor for
front without adapter

WEIGHT
201 grams / wheel
(Exclude rotor, adapter & mounting bolts)

ROTOR
1.8mm thickness

CALIPER
Flat mount, aluminum caliper
Pad adjustment
Finish : Black only

PADS
Resin pad
Easy replacement

MD-U310R [CN]

FLAT MOUNT



**LINEAR PULL BRAKE LEVER RATIO
COMMUTER – URBAN – LIFETYLE**

SYSTEM
Cable actuated mechanical disc brake
Actuated with linear pull brake lever
Flat mount Ø160mm rotor for
rear without adapter

WEIGHT
201 grams / wheel
(Exclude rotor, adapter & mounting bolts)

ROTOR
1.8mm thickness

CALIPER
Flat mount, aluminum caliper
Pad adjustment
Finish : Black only

PADS
Resin pad
Easy replacement

M5 BOLT FOR REAR					
L	10	15	20	25	30
B	22mm	27mm	32mm	37mm	42mm

NOTE: B = L + 12 mm

MD-C310F [CN]

FLAT MOUNT



ROAD DROP BAR LEVER RATIO ROAD – URBAN – LIFESTYLE

SYSTEM

Cable actuated mechanical disc brake
Actuated with road drop bar lever ratio
Flat mount Ø160mm rotor for
front without adapter

WEIGHT

198 grams / wheel
(Excludes rotor, adapter & mounting bolts)

ROTOR

1.8mm thickness

CALIPER

Flat mount, aluminum caliper
Pad adjustment
Finish : Black only

PADS

Resin pad
Easy replacement

MD-C310R [CN]

FLAT MOUNT



ROAD DROP BAR LEVER RATIO ROAD – URBAN – LIFESTYLE

SYSTEM

Cable actuated mechanical disc brake
Actuated with road drop bar lever ratio
Flat mount Ø160mm rotor for
rear without adapter

WEIGHT

189 grams / wheel
(Exclude rotor, adapter & mounting bolts)

ROTOR

1.8mm thickness

CALIPER

Flat mount, aluminum caliper
Pad adjustment
Finish : Black only

PADS

Resin pad
Easy replacement

M5 BOLT FOR REAR

L	10	15	20	25	30
B	22mm	27mm	32mm	37mm	42mm

NOTE: B = L + 12 mm



837AL [CN]

Melt forged aluminum arms
836.12(63mm) EN standard pads
Arm length : 102mm
Dimension : 20.5 - 36.5mm

Standard finish : Barrel or E.D black
Available in painted colors
Weight : 158 grams / wheel



MT2.1

For use with linear pull or disc or canti brakes
Rivet and E - clip design
Forged aluminum lever / Cast aluminum bracket
2 finger lever blade
For use with Rapidfire shifters

Standard finish : Silver lever / Black bracket
Available in painted or anodized colors
Weight : 174 grams / pair
Also available :
MT2.0 - For use with linear pull brakes only



RS360A [CN]

Cast aluminum lever & bracket
2 finger lever blade
For use with linear pull brakes and Rapidfire shifters

Standard finish : Barrel lever / Black bracket
Available in painted colors
Weight : 180 grams / pair



J310 [CN]

Melt forged aluminum arms
836.12(63mm) EN standard pads
Arm length : 95mm
Dimension : 20.5 -36.5mm

Stand finish : Barrel or E.D black
Available in panited colors
Weight : 155 grams / wheel



JL510-TS [CN]

Designed for 16" - 20" wheels
Cast aluminum lever & bracket
4 finger lever and safety lever design
For use with linear pull brakes and twist shifters

Standard finish : Barrel lever / Black bracket
Available in painted colors
Weight : 180 grams / pair
Also available : JL510 - RS - For use with Rapidifer® shifters



JL350-RS [CN]

Designed for 12" - 16" wheels
For use with linear pull brakes & thumb shifters
Designed for Ø19mm OD handlebars
Cast aluminum lever & bracket
4 finger lever blade, safety lever design

Standard finish : Barrel lever / Black bracket
Available in painted colors
Weight : 210 grams / pair
Available: JL352RS for Ø22.2mm OD handlebars



TS325A [CN]

Designed for 20" - 24" wheels
Cast aluminum lever & bracket
3 finger lever blade
For use with linear pull brakes and twist shifters

Standard finish : Barrel lever / Black bracket
Available in painted colors
Weight : 182 grams / pair



C310 [CN]

Melt forged aluminum arms
836.12(63mm) EN standard pads
Long 110mm for use on bikes with fender
Dimension : 20.5 - 36.5mm

Standard finish : Barrel or E.D black
Available in painted colors
Weight : 165 grams / wheel



855AL [CN]

Melt forged aluminum arms
836.12(63mm) EN standard pads
Long 110mm for use on bikes with fender
Dimension : 20.5 - 36.5mm

Standard finish : Barrel or E.D black
Available in painted colors
Weight : 161 grams / wheel



CL530-RS [CN]

Cast aluminum lever & bracket
4 finger lever with kraton rubber grip
For use with linear pull brakes and Rapidfire® shifters
Reach adjustment

Standard finish : Satin silver lever / Black bracket
Weight : 206 grams / pair

Also available :

CL530 - TS - For use with twist shifters

"AC" version - For use with roller / canti - brakes



CL535-RT [CN]

Integrated bell design
Cast aluminum lever & bracket
4 finger lever with kraton rubber grip
For use with linear pull brakes and Rapidfire or twist shifters
For left hand side only

Standard finish : Satin silver lever / Black bracket
Weight : 131 grams / piece

Also available :

CL535C- RT - For use with roller / canti - brakes



900C [CN]

Dual pivot caliper brake
Melt forged aluminum arms
P205(8°) - Black pads for stainless steel rim
P205(0°) - Grey pads for aluminum rim
Dimension : 72 - 92mm

Standard finish : Barrel or E.D black
Weight : 200 grams / wheel



810C [CN]

Dual pivot caliper brake
Melt forged aluminum arms
P205(8°) - Black pads for stainless steel rim
P205(0°) - Grey pads for aluminum rim
Dimension : 61 - 81mm

Standard finish : Barrel or E.D black
Weight : 214 grams / wheel



RS397 [CN]

For use with caliper or roller brakes
Cast aluminum lever & bracket
4 finger lever blade
For use with thumb shifters

Standard finish : Barrel lever / Silver painted bracket
Weight : 180 grams / pair
Also available : NS397A - For use with 3-speed Revoshift®



CL332-RS [CN]

For use with caliper or roller brakes
Cast aluminum lever & bracket
4 finger lever blade
For use with thumb shifters

Standard finish : Barrel lever / Silver painted bracket
Weight : 202 grams / piece
Available : CL332-NS - For use with 3-speed Revoshift®



E-BIKE COLLECTION


HD-E745
HD-E541
HD-E350

HD-T745
HD-E545
EL550-RS

HD-E740
HD-T545
EL555-RT

HD-T740
HD-T737
EL350-RS

HD-E540
HD-E730
EL355-RT

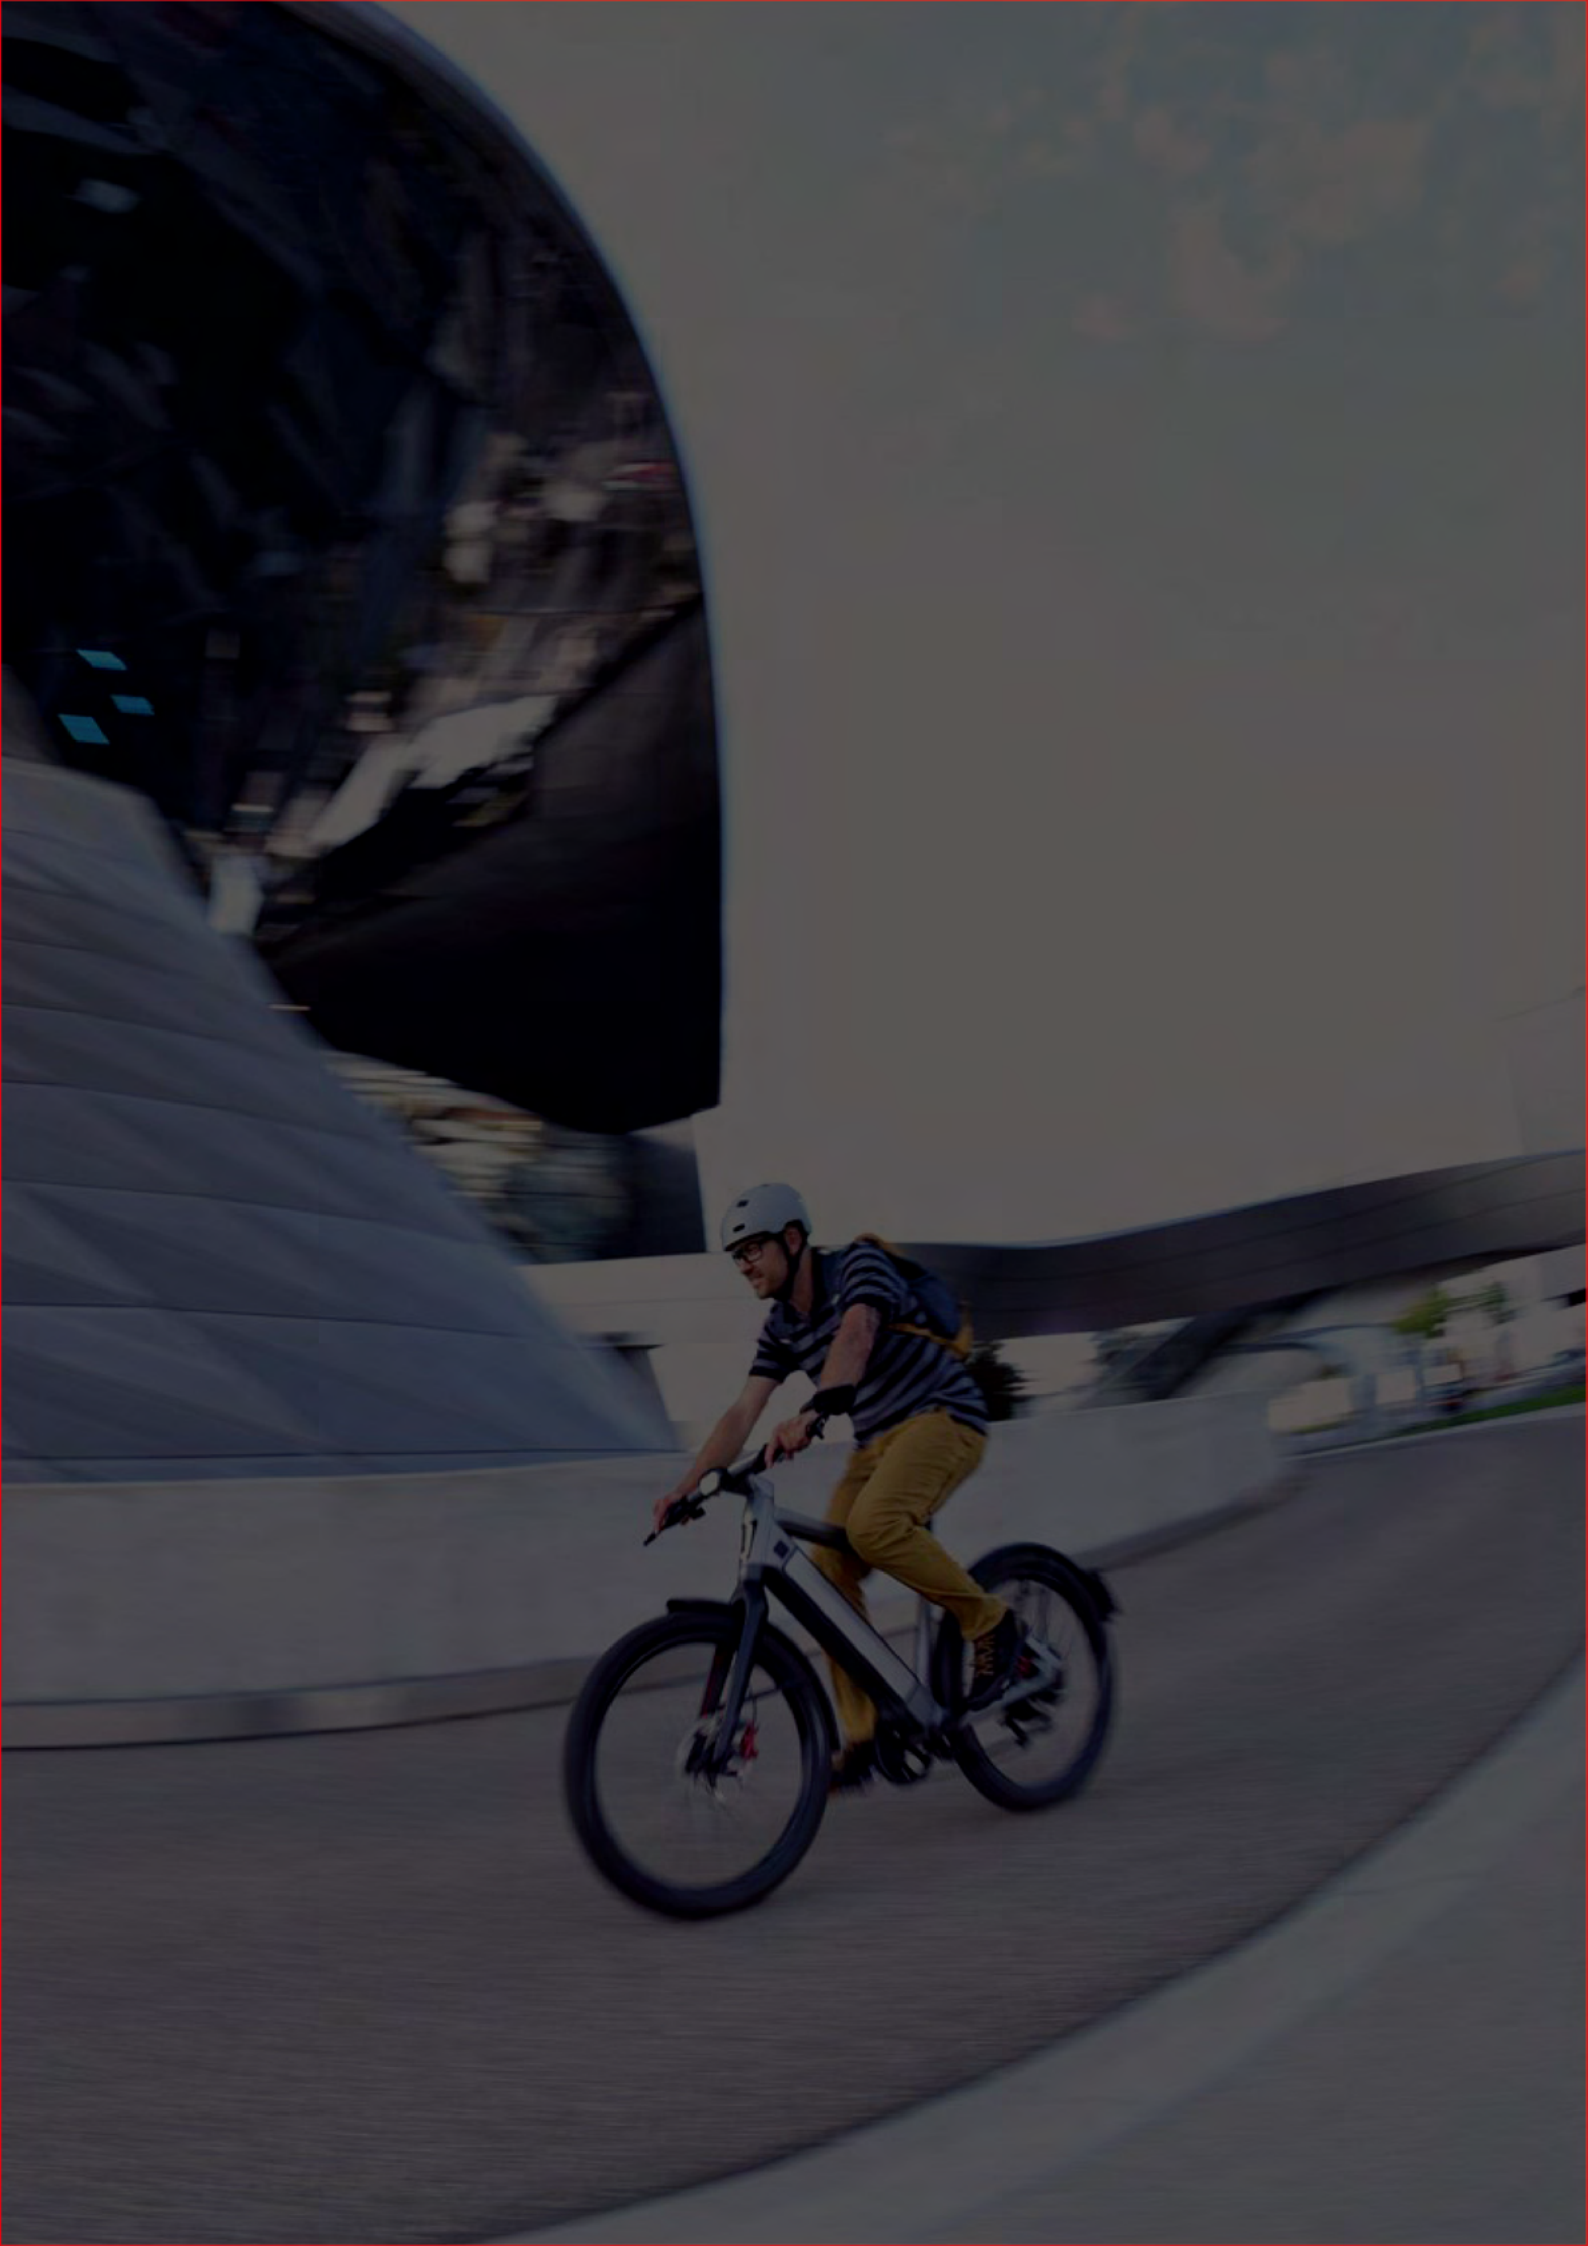

HD-E745 / HD-T745

AURIGA
TWIN+

**THICKER ROTOR, RESIN PAD & BALL-END LEVER
BE POWERFUL & DURABLE FOR E-CARGO**

**SYSTEM**

Open syste, 4 piston
Twin-Caliper for Tri-bike
With power cut-off sensor
Powerful and durable brake
#50 Ø5.5mm Resistant-expansion oil hose

WEIGHT

696 grams / set
(Excludes rotor, adapter & mounting bolts)

ROTOR

2.3mm thickness
Six bolt : TR-17 / TR-54
Center Lock : TR-45 / TR-45A

PADS

5mm pad Q13RS
Performance & durable resin pad
Upload replacement

CALIPER

4 piston forged aluminum body
Free angle of hose connector for varied frames
Easy installation & maintenance from top
Finish : Black

LEVER

Forged aluminum lever / cast bracket
Parking lock mechanism
4 finger ball-end lever blade
Two-piece clamp
Reach Adjustment
Finish : Black

Option

HD-T745,HD-E746,HD-E747,HD-T746,HD-T747

4PISTON

Standard



Mirror side



Q13RS



TR-54



TR-17



2.3mm

TR-45 /
TR-45A

Model	Power Sensor	Parking Lock	Caliper
HD-E745	V	V	Standard/mirror side
HD-T745		V	Standard/mirror side
HD-E746	V	V	Both standard
HD-T746		V	Both Standard
HD-E747	V	V	Both Mirror Side
HD-T747		V	Both Mirror Side

HD-E740 / HD-T740

AURIGA+

**THICKER ROTOR, RESIN PAD & BALL-END LEVER
BE POWERFUL & DURABLE FOR E-CARGO**



4PISTON



Q13RS



TR-54



TR-17



2.3mm

TR-45 /
TR-45A**SYSTEM**

Open system, 4 piston

With power cut-off sensor

Powerful and durable brake

Easy installation, adjustment and maintenance

#50 Ø5.5mm Resistant-expansion oil hose

WEIGHT

Front - 449 grams

Rear - 469 grams

(Excludes rotor, adapter & mounting bolts)

ROTOR

2.3mm thickness

Six bolt : TR-17 / TR-54

Center Lock : TR-45 / TR-45A

PADS

5mm pad - Q13RS

Performance & durable resin pad

Upload replacement

CALIPER

4 piston forged aluminum body

Free angle of hose connector for varied frames

Easy installation & maintenance from top

Finish : Black

LEVER

Forged aluminium lever / cast bracket

4 finger ball-end lever blade

Two-piece clamp

Reach adjustment

Finish : Black

Option

HD-T740, HD-T741

Model	Power Sensor	Parking Lock
HD-E740	V	
HD-T740		
HD-E741	V	V
HD-T741		V

HD-E545 / HD-T545

AURIGA
TWIN**SYSTEM**

Open system, 2 piston
Twin-Caliper for Tri-bike
With power cut-off sensor
Easy installation,
adjustment and maintenance
#50 5.5mm resistant expansion oil hose

WEIGHT

635 grams / wheel
(Excludes rotor, adapter & mounting bolts)

ROTOR

2.3mm thickness
Six bolt : TR-17 / TR-54
Center Lock : TR-45 / TR-45A

PADS

5mm pad - P21.11
Durable and performance resin pad
Upload replacement

CALIPER

Forged aluminum body
Free angle of hose connector for
varied frames
Easy pad replacement from top
Finish : Black only

LEVER

Forged aluminum lever & cast bracket
Parking Lock Mechanism
Reach adjustment
Two-piece bracket
3 finger blade
Finish: Black

Option :

HD-T545,HD-E546,HD-E547,HD-T546,HD-T547



Standard



Mirror side



P21.11



TR-54



TR-17



2.3mm

TR-45 /
TR-45A

Model	Power Sensor	Parking Lock	Caliper
HD-E545	V	V	Standard/mirror side
HD-T545		V	Standard/mirror side
HD-E546	V	V	Both standard
HD-T546		V	Both Standard
HD-E547	V	V	Both Mirror Side
HD-T547		V	Both Mirror Side

HD-E540 / HD-E541

AURIGA**SYSTEM**

Open system, 2 piston

With power cut-off sensorEasy installation,
adjustment and maintenance**#50 5.5mm resistant expansion oil hose****WEIGHT**

Front - 415 grams / Rear - 435 grams

(Exclude rotor, adapter & mounting bolts)

ROTOR**2.3mm thickness**

Six bolt : TR-17 / TR-54

Center Lock : TR-45 / TR-45A

PADS**5mm pad - P21.11**

Durable and performance resin pad

Upload replacement

CALIPER

Forged aluminum body

Free angle of hose connector for
varied frames

Easy pad replacement from top

Finish : Black only

LEVER

Forged aluminum lever & cast bracket

Without parking lock

Reach adjustment

Two-piece bracket

3 finger blade

Finish: Black

Option :**HD-T540,HD-T541**

P21.11



TR-54



TR-17



2.3mm

TR-45 /
TR-45A

Model	Power Sensor	Parking Lock
HD-E540	V	
HD-T540		
HD-E541	V	V
HD-T541		V

HD-T737



SYSTEM

Open system, 4 piston

Without power cut-off sensor

Powerful and durable brake

Easy installation, adjustment and maintenance

#50 Ø5.5mm Resistant-expansion oil hose

WEIGHT

Front - 437 grams / Rear - 457 grams

(Exclude rotor, adapter & mounting bolts)

ROTOR

2.3mm thickness

Six bolt: TR-17 / TR-54

Center lock: TR-45 / TR-45A

CALIPER

4 piston forged aluminum body

Free angle of hose connector for varied frames

Easy installation & maintenance from top

With 5mm pad

Finish: Black

LEVER

Forged aluminum lever / cast bracket

3 finger blade

Two-piece clamp

Reach adjustment

Finish: Black

PADS

5mm pad - Q13RS

Performance & durable resin pad

Upload replacement

HD-E730



SYSTEM

Open system, 4 piston

With power cut-off sensor

Powerful and durable brake

Easy installation, adjustment and maintenance

WEIGHT

Front - 395 grams / Rear - 430 grams

(Exclude rotor, adapter & mounting bolts)

ROTOR

2.3mm thickness

Six bolt: TR-17 / TR-54

Center Lock: TR-45 / TR-45A

CALIPER

4 piston forged aluminum body

Free angle of hose connector for varied frames

Easy installation & maintenance from top

Finish: Black

LEVER

Forged aluminum lever / bracket

4 finger ball-end lever blade

Two-piece clamp

Reach adjustment

Finish: Black

PADS

Overall balance resin pad

Upload replacement

HD-E350 [CN]



SYSTEM

Open system, 2 piston

With power cut-off sensor

Easy installation, adjustment and maintenance

WEIGHT

Front - 302 grams

Rear - 322 grams

(Exclude rotor, adapter & mounting bolts)

ROTOR

1.8mm thickness

CALIPER

Forged aluminum body

Easy pad replacement

Finish : Black

LEVER

Cast aluminum lever & bracket

Reach adjustment

Two-piece clamp

3 finger blade

Finish : Black

PADS

Low noise resin pad

Easy replacement

Magnet Set for Speed Sensor Spec




SP-SS10

The magnet for six bolts rotor.
Magnet toward outward.



TR02

The magnet for six bolts rotor
Magnet toward inward.

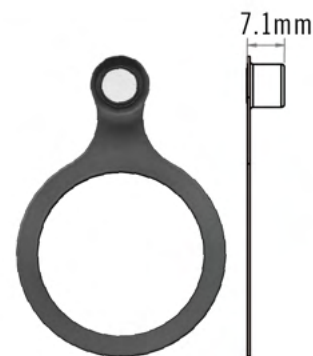

SP-SS30

The magnet for center lock rotor
Magnet toward inward.

	SIX BOLTS ROTOR MODELS	Center Lock Rotor Models
SP-SS10	TEKTRO all Six Bolts Rotor	NO COMPATIBLE
TR02	TR17*, TR24*, TR52*, TR53*	NO COMPATIBLE
SP-SS30	Use CL Rotor Adapter Sets (CL HUB to Six bolts Rotor): SP-CL81/86 TR17*, TR24*, TR52*, TR53*	TR35*, TR35A*, TR45*, TR45A*

* All Dimension

Adjustable sensor control



EL550-RS [CN]

Adjustable sensor control designed
Cast aluminum lever & bracket
4 finger lever with kraton rubber grip
For use with linear pull brakes & Rapidfire® shifters

Standard finish : Satin silver lever / Black bracket
Weight : 119 grams / piece

Also available :

EL550C - RS - For use with roller / canti-brakes

Adjustable sensor control



EL555-RT [CN]

Integrated bell
Adjustable sensor control designed
Cast aluminum lever & bracket
4 finger lever with kraton rubber grip
For use with linear pull brakes & Rapidfire® shifters
For left hand side only

Standard finish : Satin silver lever / Black bracket
Weight : 143 grams / piece

Also available :

EL555C - RT - For use with roller / canti-brakes

Adjustable sensor control



EL350-RS [CN]

Adjustable sensor control designed
Cast aluminum lever & bracket
4 finger lever blade
For use with linear pull brakes & Rapidfire® shifters

Standard finish : Barrel lever / Black bracket
Weight : 108 grams / piece

Also available :

EL350C - RS - For use with roller / canti-brakes

Adjustable sensor control



EL355-RT [CN]

Integrated bell
Adjustable sensor control designed
Cast aluminum lever & bracket
4 finger lever blade
For use with linear pull brakes & Rapidfire® shifters
For left hand side only

Standard finish : Barrel lever / Black bracket
Weight : 136 grams / piece

Also available :

EL355C - RT - For use with roller / canti-brakes



R326

Lightweight design
Dual pivot caliper brake
Forged aluminum arms
Designed for 28C tire
Quick release mechanism
P473 adjustable angle cartridge pads
Dimension : 39 - 54mm
24 - 28mm rim width compatible

Standard finish : Silver or black anodized
Weight : 188 grams / wheel



R359

Dual pivot caliper brake
Forged aluminum arms
Quick release designed for big tires (32C)
With Quick release safety lock
P473 adjustable angle cartridge pads
Dimension : 47 - 59mm

Standard finish : Silver or black anodized
Weight : 175 grams / wheel



R315 [CN]

Dual pivot caliper brake
Melt forged aluminum arms
Quick release mechanism
P473 adjustable angle pads
Dimension : 41 - 57mm

Standard finish : Ceramic barrel or E.D black
Weight : 193 grams / wheel



R313 [CN]

Dual pivot caliper brake
Melt forged aluminum arms
Designed for 28C tire
Quick release mechanism
P473 adjustable angle pads
Dimension : 39 - 52mm

Standard finish : Ceramic barrel or E.D black
Weight : 180 grams / wheel



FL750

For use with caliper or canti-brakes
Designed for single speed bikes
Forged aluminum lever / Cast aluminum bracket
3 finger lever blade
For use with Rapidfire shifters

Standard finish : Silver lever / Black bracket
Available in painted or anodized colors
Weight : 117 grams / pair



FL540

For use with caliper or canti-brakes
Forged aluminum lever / Cast aluminum bracket
2 finger lever blade
For use with Rapidfire shifters

Standard finish : Silver lever / Black bracket
Available in painted or anodized colors
Weight : 120 grams / pair



RX1.0

Compatible Mini-V, Canti brake & road disc
Forged aluminum lever / Cast aluminum bracket
3 finger lever blade
Compatible Rapidfire shifters

Standard finish : Silver lever / Black bracket
Available in painted or anodized colors
Weight : 167 grams / pair



RX4.1

For use with caliper or canti-brakes
Forged aluminum lever / Cast aluminum bracket
Expanding plug clamp style
For use with 19.6 - 20.6 mm ID aero bars
Return spring and reach adjustment

Standard finish : Silver or Black lever / Black bracket
Available in anodized or painted colors
Weight : 166 grams / pair

Oryx



992AG

Forged aluminum arms
Linear spring designed
Dual micro tension adjusters
720.12(55mm) cartridge pads, more clearance
Dimension : 23 - 37 mm

Standard finish : black or silver anodized
Available in anodized colors
Weight : 150 grams / wheel
992A - With 520.12(55mm) standard pads

Mini-V



RX1 [CN]

Melt forged aluminum arms
836.12(63mm) EN standard pads
Arm length : 85mm
Dimension : 20.5 - 36.5mm

Standard finish : Barrel or E.D black
Available in painted colors
Weight : 150 grams / wheel



RL340

Aero lever
Forged aluminum lever
Quick release mechanism
Compatible mini-V, road brake & road disc

Standard finish : Silver or Black lever / Black rubber hood
Also available : Brown rubber hood
Weight : 300 grams / pair
Also available :
RL341-Designed specifically for small hand




RL720

Top mount lever
For use with caliper or canti-brakes
Forged aluminum lever & bracket
Hinged clamp style
For use with 24 mm OD handlebars
Reach adjustment and return spring

Standard finish : Silver lever / Black bracket
Weight : 90 grams / pair
Also available :
RL721 - For use with 31.8mm OD handlebars
RL726 - For use with 26.0mm OD handlebars

ADAPTER

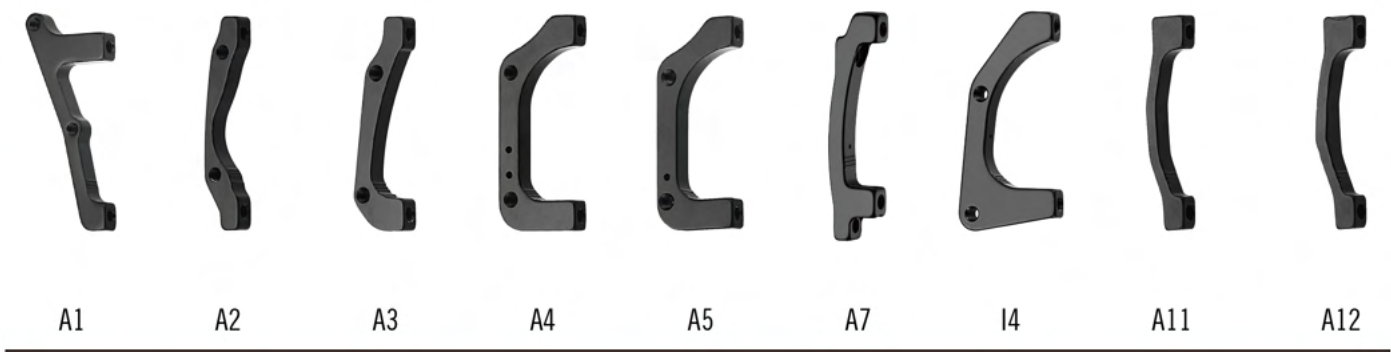

ADAPTER INSTRUCTION CHART


NOTE = F: Standard front fork / R: Standard rear frame / None: Currently not available

Rotor Size \ Use series of disc brake		IS	
		F	R
Ø 140mm		A1	A2
Ø 160mm		A2	A3
Ø 180mm		A3	A4
Ø 203mm		A5	I4

PM specification \ Adapt to rotor size		POST MOUNT			
		140	160	180	203
Fork	PM 140	-	A11	None	None
&	PM 160	None	-	A11	A7
Frame	PM 180	None	None	-	A12



FLAT MOUNT F7(140) F7(160) F6(160)-Rear

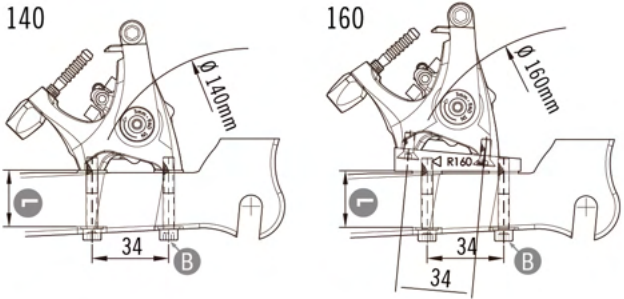


FM specification \ Adapt to rotor size		FLAT MOUNT W / FM DISC BRAKE	
		140	160
Fork	F70	F7	F7
Rear	R34	-	F6



M5 BOLT FOR REAR						
L	10	15	20	25	30	35
B	17mm	22mm	27mm	32mm	37mm	42mm

NOTE: B = L + 7 mm

ROTOR



Part NO.	Anti-vibration rotor for 2 piston caliper	Anti-vibration rotor for 4 piston caliper	Center lock / Steel inner piece (T: 1.8mm)
Ø 140mm	-	-	TR140-35
Ø 160mm	TR160-52	TR160-53	TR160-35
Ø 180mm	TR180-52	TR180-53	TR180-35
Ø 203mm	TR203-52	TR203-53	TR203-35



Part NO.	T: 1.8mm	T: 1.8mm	5 bolt mount (T: 1.8mm)
Ø 140mm	TR140-22	-	-
Ø 160mm	TR160-22	TR160-46	TR160-47
Ø 180mm	-	-	TR180-47
Ø 203mm	-	-	-




Part NO.	T: 2.3mm	Center lock / Steel inner piece (T: 2.3mm)	T: 2.3mm	5 bolt mount (T: 2.3mm)
Ø 140mm	-	-	-	-
Ø 160mm	TR160-54	TR160-45	TR160-17	TR160-47E
Ø 180mm	TR180-54	TR180-45	TR180-17	TR180-47E
Ø 203mm	TR203-54	TR203-45	TR203-17	-

DISC PADS



Q10RS

Overall balance resin pad
For 4 piston caliper



E10.11

Less noise



Q13RS

Overall balance resin pad
5mm thickness
For 4 piston caliper



F10XS

Less noise




P20.11

Overall balance resin pad




F10BS

With Return Spring
HD-R510 / R310



P21.11

Overall balance resin pad
5mm thickness



E11.11

Less noise
5mm thickness

ACCESSORIES



#10 Ø5.5mm BANJO UNIT

LENGTH : 2000mm



#10 Ø5.5mm CONNECTING UNIT

LENGTH : 2000mm



#10 Ø5.5mm HOSE SPARE PARTS



#30 Ø5.0mm BANJO UNIT

LENGTH : 2000mm



#30 Ø5.0mm CONNECTING UNIT

LENGTH : 2000mm



#30 Ø5.0mm HOSE SPARE PARTS

 Resistant expansion oil hose for Twin+ and Auriga+ series brakes.



#50 Ø5.5mm BANJO UNIT

LENGTH : 3200mm



#50 Ø5.5mm CONNECTING UNIT

LENGTH : 2500mm



#50 Ø5.5mm HOSE SPARE PARTS



- M395 Caliper Connector(M6)
- SHIMANO® Lever Connector(M5)
- TEKTRO® Caliper Connector(M6)
- TEKTRO® Lever Connector(M6)
- MAGURA® Lever Connector(M6)



BLEED PUMP MACHINE

Used for hydraulic disc brake system
Voltage - 110V or 220V
Volume - 2000ml



1000/100 ml MINERAL OIL



ADVANCE BLEED KIT

Bleed injector with bleed screw
4P & 2P caliper piston stopper for 5mm & 4mm pad
Hose kits for Ø5.0mm & Ø5.5 mm :
Compression insert / ferrule / Retainer



**Ø5.5mm BASIC BLEED KIT
Ø5.0mm BASIC BLEED KIT**



HOSE CUTTER

- 1) Cut oil hose
- 2) Install compression insert
- 3) Work for Ø5.5 & Ø5.0 oil hose



PISTON SPREADER

Pushes the pistons back into the caliper and prepares for brake pad replacements.

Magnet Speed Sensor

TR02 :

Magnet Toward Inboard


NO interference issue between Bike Frame

Specified to Mounting on specific Rotor models

Compatible for rotor type TR-17 / TR-24 / TR-52 / TR-53



Magnet Set for Speed Sensor Spec




SP-SS10

The magnet for six bolts rotor.
Magnet toward outward.



TR02

The magnet for six bolts rotor
Magnet toward inward.




SP-SS30

The magnet for center lock rotor
Magnet toward inward.

The cross section area between $\varnothing 45$ to $\varnothing 80$ is the interference area.



For SP-SS10
Clearance between the interference area and the bike frame must be greater than or equal to 5mm

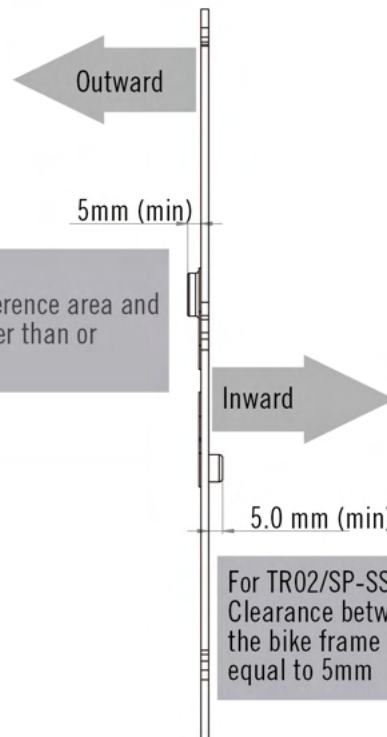

For TR02/SP-SS30
Clearance between the interference area and the bike frame must be greater than or equal to 5mm

	SIX BOLTS ROTOR MODELS	Center Lock Rotor Models
SP-SS10	TEKTRO all Six Bolts Rotor	NO COMPATIBLE
TR02	TR17*, TR24*, TR52*, TR53*	NO COMPATIBLE
SP-SS30	Use CL Rotor Adapter Sets (CL HUB to Six bolts Rotor): SP-CL81/86 TR17*, TR24*, TR52*, TR53*	TR35*, TR35A*, TR45*, TR45A*

* All Dimension

Lock Ring



TR50 : $\varnothing 12$ Axle Steel



TR55 : $\varnothing 15-20$ Axle Steel

ASIA / OCEANIA

TAIWAN
TEKTRO TECHNOLOGY CORP.
TEL : +886-4-7683999
tracy@tektro.com.tw
www.tektro.com

AUSTRALIA
BICYCLE PARTS WHOLESale
TEL : +61 3 9702 9044
sales@bicyclepartswholesale.com.au
www.bicyclepartswholesale.com.au

CHINA
TEKTRO (Wuxi) TECHNOLOGY CO., LTD
TEL : +86-510-88266866
john_chen@tektro.com.cn
www.tektro.com.cn

ISRAEL
PEDALIM
TEL : +972 26729904
pedalim@gmail.com
www.pedalim.com

JAPAN
ASAHI CO., LTD.
TEL : 06 69247887
wholesale_business@cb asahi.jp
www.cb-asahi.jp

JAPAN
MEGA GREEN STAR
TEL : 050-5532-5632
shinji.mega23@gmail.com

KOREA
COMET BICYCLE Co. Ltd.
TEL : +82 31 795 8357
hckim@cometbicycle.com
www.cometbicycle.com

NEW ZEALAND
MARLEEN WHOLESALERS LTD.
TEL : +6433484150
Bevan@marleen.co.nz
www.marleen.co.nz

Philippines
BUZZWHEEL MARKETING CORPORATION
TEL : (63 2) 400-2442
bromptonphilippines@gmail.com

SINGAPORE
THE BIKE SETTLEMENT
TEL : +6597360951
wholesale@thebikesettlement.com
www.thebikesettlement.com

SINGAPORE
Crankworkz
TEL : +65 96928387
raychoi@crankworkz.com.sg
www.facebook.com/crankworkz

NORTH / SOUTH AMERICA

USA
TEKTRO USA
TEL : 1-877-807-4162
Info@trpbrakes.com
www.trpcycling.com

ARGENTINA
FERRARIS S.R.L
TEL : +54 1143076723
+54 1143076013
ferraris@fibertel.com.ar

CHILE
RAFAEL BURGOS S.A.
TEL : +562 25200600
rburgos@rburgos.cl
www.rburgos.cl

COLOMBIA
LEN IMPORTACIONES
TEL : +57-7-6712222
servicioalcliente@lenimp.com
www.lenimp.com

COSTA RICA
DISTRIBUIDORA DE BICICLETAS DISDEBI S.A.
TEL : (506) 2440-9248
kmurillo@disdebisa.com
www.disdebisa.com

MEXICO
FAMMAX Comercializadora
TEL : +52 55226975
cguerrero_fammax@hotmail.com
<http://fammax.com.mx>

SOUTH-AFRICA
OMNICO (PTY) LTD.
TEL : 021 691 0100
Petri@omnico.co.za
www.omnico.co.za

EUROPE

GERMANY
TEKTRO Europe GmbH
TEL : +49-6324-96797-20
service@tektro.eu
www.tektro.com

CANADA
CYCLES LAMBERT inc.
TEL : 1 855 526-2378 (Toll-Free)
418-835-1685 (Québec)
info@cycleslambert.com
www.cycleslambert.com

BENELUX
BUZAGLO B.V.
TEL : +31 (0)365210100
info@buzaglo.nl
www.buzaglo.nl

ITALY
B.I.S Srl
TEL : +39 0322889811
valentina@bissrl.it
www.bissrl.it

CANADA
LTP SPORTS GROUP INC. NORCO BICYCLES
TEL : 604-552-2930 ext. 209
www.norco.com/

CZECH REPUBLIC
UNIVERSE AGENCY SPOL S.R.O
TEL : 224 990 777
petr.fiala@author.cz
www.uniag.biz

NORWAY
DELER AS
TEL : 47-64989950
post@deler.no
www.deler.no/

USA
HANS JOHNSEN COMPANY
TEL : 800-879-1515
sales@hjc.com
www.hjc.com

DENMARK
SONDERGAARD & SONNER A/S
TEL : +45 86281022
bet@Bikesond.dk
www.bikesond.dk

POLAND
PRO SPORT
TEL : +48 508 239 109
info@head-bikes.pl
www.head-bikes.pl

USA
QUALITY BICYCLE PRODUCTS
TEL : 1-888-988-8959
customerservice@qbp.com
www.qbp.com

FRANCE
Tribe Sport
TEL : +33 4 94541750
jerome.r@tribesportgroup.com
www.tribesportgroup.com/

RUSSIA
VeloTrade LLC
TEL : +74957872233
info@velomasterskaya.ru
www.velostrana.ru

USA
Hawley, LLC
TEL : 800-822-1980
sales@hawleyusa.com
www.hawleyusa.com

GERMANY
MERIDA & CENTURION GERMANY GMBH
TEL : 07159 9459300
vertrieb@merida-centurion.com
www.centurion.de

SWITZERLAND
TEKNO PARTS LTD.
TEL : +41 (0)32 332 84 64
info@teknoparts.ch
www.teknoparts.ch

GERMANY
E. WIENER BIKE PARTS
TEL : +49 (0)9721 / 650-10
www.bike-parts.de

UK
UPGRADE BIKES LTD.
TEL : +44(0)1403 711 611
Info@Upgradebikes.co.uk
www.upgradebikes.co.uk

GERMANY
HARTJE
TEL : +49 (0)4251 / 811-20
info@hartje.de
www.hartje.de

UKRAINE
VYSOTA LLC
TEL : +38 044 417 33 86
info@vysota.com.ua
www.vysota.com.ua/

HUNGARY
BIKEFUN
TEL : +36 1 278 5210
kp@bikefun.eu
www.bikefun.eu



Rapidfire® and Revoshift® and I-Spec® are registered trademarks of Shimano® Inc.
Matchmaker® is registered trademarks of Sram® LLC.
Magura® is registered trademarks of Gustav Magenwirth GmbH®.
All information is subject to change without notice