2021 FRONT

ASTM CATEGORY 2 : road and offroad with jumps less than 15cm

For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesnn't


exceed 120kg, bike included


Recommended tyre sizes: 25 to 32 mm

Max. Pressure: see indication on wheel and tyre. If they differ, use the lowest of the $2\,$

REFERENCES WHEELS

F90291 Cosmic SL 45 DCL Ft

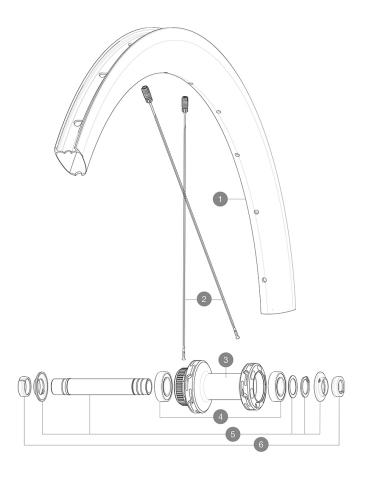



RIMS



:

1	V4092815	Kit Front/Rear rim Cosmic SL 45 Disc	
	V2620101	UST RIM TAPE 25mm (for 21-24mm wide rim)	

SPOKES

2 V4162901 Kit 12 Front/Rear Cosmic SL 45 Disc butted stainless spoke 2

HUB SHELLS

3	N/A	HUB BODY
4	M40129	KIT 2 BEARINGS 6902 15x28x7
5	V2373301	KIT QRM AUTO FRONT AXLE 12mm > 2019
6	V2680501	12mm Road Axle Cap QRM Auto

MAVIC Cosmic SL 45 Disc

DELIVERED WITH

Front QR adapters (996 941 01 for MTB or B41 043 01 for road)	
Rear QR adapters for Instant Drive 360 (B49 894 01)	
UST valve and accessories (129 838 01)	
User guide	

COMPATIBILITY

Freewheel: Shimano/Sram, convertible to Campagnolo and XD-R with optional driver bodies	
Front axle: 12x100 thru axle, easily convertible to quick release with included adapters. Not compatible with 15mm through axles.	
Rear axle: 12mm thru axle, convertible to Quick Release with included adapters	

Specifications

RIMS

■ Material: 100% carbon fiber • Height: 45 mm - Drilling: traditional Disc brake specific profile • Tire: UST Tubeless and tubetype

• Internal width: 19 mm ■ ETRTO size: 622x19TC Road

UST

SPOKES

- Material : steel

- Shape: straight pull, flat, double butted

- Nipples : brass, ABS

Count: 24 front and rear
Lacing: front and rear crossed 2, contactless

WHEEL HUB

• Front and rear bodies : aluminum -Axle material: aluminum

• Front: Quick release and 12x100 through axle compatible

• Rear: Quick Release, 12x142 and 12x135

compatible Infinity Hub Instant Drive 360 QRM Auto

VERSIONS

• Disc standard : Center Lock (R) only • Freewheel: Shimano/Sram or XD-Road

WHEEL WEIGHTS

730