


ASTM CATEGORY 2 : road and offroad with jumps less than 15cm For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesnn't exceed 120kg, bike included Recommended tyre sizes: 25 to 32 mm Max. Pressure: see indication on wheel and tyre. If they differ, use the lowest of the 2

## **REFERENCES WHEELS**

F90411 Ksyrium SL DCL Ft



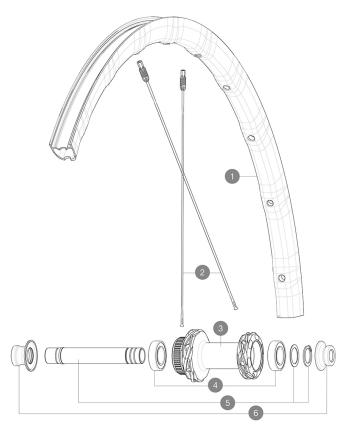

HUB SHELLS				

4	M40129	KIT 2 BEARINGS 6902 15x28x7	
E	V0070001	KIT ODM ALITO FRONT AVEC 10mm	20

 5
 V2373301
 KIT QRM AUTO FRONT AXLE 12mm > 2019

 6
 V2374701
 KIT FRONT ROAD FORK REST 12mm FOR J BENT DISC HUB



# MAVIC Ksyrium SL Disc

# **DELIVERED WITH**

UST valve and accessories (129 838 01)	
User guide	

# **COMPATIBILITY**

Freewheel: Shimano/Sram, convertible to Campagnolo and XD-R with optional driver bodies	
Front axle: 12x100 thru axle, easily convertible to quick release with included adapters. Not compatible with 15mm through axles.	
Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters	

# **Specifications**

#### RIMS

- Material : Maxtal • Height: 22 mm Disc brake specific profile - Weight reduction : ISM 4D • Tire : UST Tubeless and tubetype - Internal width : 19 mm • ETRTO size : 622x19TC Road Fore UST SUP

# SPOKES

- Material : steel • Shape : straight pull, elliptical aero, double butted (patented) • Nipples : Fore integrated aluminum • Count: 24 front and rear  $\hfill \textbf{-Lacing}$  : front and rear crossed 2, contactless

## WHEEL HUB

• Front and rear bodies : aluminum • Axle material : aluminum • Front : Quick release and 12x100 through axle compatible • Rear: Quick Release, 12x142 and 12x135 compatible Infinity Hub Instant Drive 360 QRM Auto VERSIONS

- Disc standard : Center Lock (R) only -Freewheel: Shimano/Sram or XD-Road

# WHEEL WEIGHTS

723