
ASTM CATEGORY 4: ENDURO AND TRAIL RIDING

For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesnn't exceed 120kg, bike included

Recommended tyre sizes: 60mm to 76mm (2.35" to 3.0")

REFERENCES WHEELS

F90493 Crossmax XLS 29 Ft Bst* F91972 Crossmax XLS 29 DCL Ft Bst*

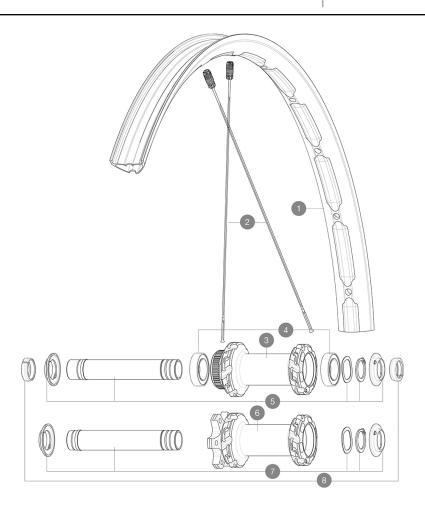



RIMS



:

1 V3765915 Kit Front/Rear rim Crossmax XLS 29"

SPOKES

2 V2388301 Kit 12 Front/Rear Crossmax SL/SLS/XL/XLS 29" butted spoke 2

HUB SHELLS

3	N/A	HUB BODY
4	V2500901	KIT BEARINGS 18x30x7 + WAVED WASHER + CLIP
5	V2375601	Kit 110mm axle QRM auto MTB from 2019 DCL
6	N/A	HUB BODY
7	V2372401	KIT 110mm AXLE QRM AUTO MTB > 2019
8	V2372501	15mm MTB Axle Can OBM Auto From 2019

MAVIC Crossmax XL S 29

2021 FRONT

DELIVERED WITH

UST valve and accessories (129 838 01)	
Multifonction adjustment wrench (delivered with rear wheel) (325 423 01)	
2 replacement spokes with each wheel	
Fore adjustment wrench	

COMPATIBILITY

Freewheel: Shimano HG9, XD or Micro Spline	
Rear axle: 12x148 Boost thru axle	
Front axle: 15x110 Boost thru axle	

Specifications

RIMS

- Material : Maxtal - Material: S6000 Aluminum ■ Weight reduction: ISM • Tire: UST Tubeless and tubetype - Internal width: 30 mm

Black Shield treatment (protects your rim against impacts and scratches)

- ETRTO size 29": 622x30TC Asymmetrical rim design Fore SUP

SPOKES

- Material : steel

• Nipples : Fore integrated aluminum • Count : 24 front and rear

 ${\color{red} \bullet } \, \text{Lacing}: \, \, \text{front and rear crossed 2, contactless}$

WHEEL HUB

Hub available with 6-bolt or center lock (R) brake

-Axles: Front 15X110 Boost; Rear 12X148 Boost Infinity Hub

Instant Drive 360 QRM Auto

VERSIONS

- Disc standard: 6 Bolts or Center Lock (R) - Hub width: Boost only (front 110, rear 148) • Freewheel: SRAM XD, Shimano HG9, Shimano Micro-Spline

WHEEL WEIGHTS

830