

ASTM CATEGORY 2 : road and offroad with jumps less than 15cm


For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesnn't

exceed 120kg, bike included Recommended tyre sizes: 25 to 32 mm

Max. Pressure: see indication on wheel and tyre. If they differ, use the lowest of the 2

REFERENCES WHEELS

F90231 Ksyrium S DCL Ft

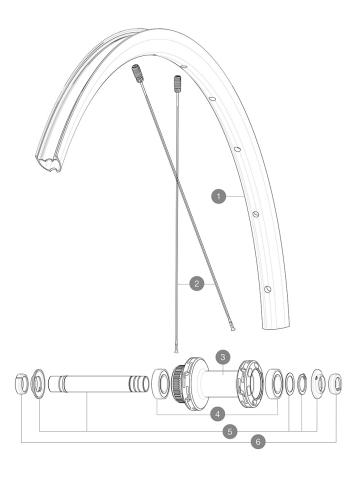



RIMS



:

1 V4093410 Kit Front rim Ksyrium S Disc

SPOKES

2 V4163501 Kit 12 Front/Rear Ksyrium S Disc butted spoke 294mm M7/7

HUB SHELLS

3	N/A	HUB BODY
4	M40129	KIT 2 BEARINGS 6902 15x28x7
5	V2373301	KIT QRM AUTO FRONT AXLE 12mm > 2019
6	V2680501	12mm Road Axle Cap QRM Auto

MAVIC Ksyrium S Disc

DELIVERED WITH

Front QR adapters (996 941 01 for MTB or B41 043 01 for road)	
Rear QR adapters for Instant Drive 360 (B49 894 01)	
UST valve and accessories (129 838 01)	
User guide	

COMPATIBILITY

Freewheel: Shimano/Sram, convertible to Campagnolo and XD-R with optional driver bodies	
Front axle: 12x100 thru axle, easily convertible to quick release with included adapters. Not compatible with 15mm through axles.	
Rear axle: 12mm thru axle, convertible to Quick Release with included adapters	

Specifications

RIMS

• Material: Maxtal • Height: 22 mm Disc brake specific profile • Tire: UST Tubeless and tubetype • Internal width: 19 mm • ETRTO size: 622x19TC Road Fore

UST SUP

SPOKES

- Material : steel

Shape: straight pull, flat, double butted
Nipples: Fore integrated aluminum
Count: 24 front and rear

• Lacing: front and rear crossed 2, contactless

WHEEL HUB

Front and rear bodies : aluminumAxle material : aluminum

• Front: Quick release and 12x100 through axle compatible

• Rear: Quick Release, 12x142 and 12x135

compatible Infinity Hub Instant Drive 360 QRM Auto

VERSIONS

Disc standard: Center Lock (R) only
Freewheel: Shimano/Sram or XD-Road

WHEEL WEIGHTS

750