


## REFERENCES WHEELS

ASTM CATEGORY 2 : road and offroad with jumps less than 15cm  
 For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 120kg, bike included  
 Recommended tyre sizes: 25 to 32 mm  
 Max. Pressure: see indication on wheel and tyre. If they differ, use the lowest of the 2



## RIMS

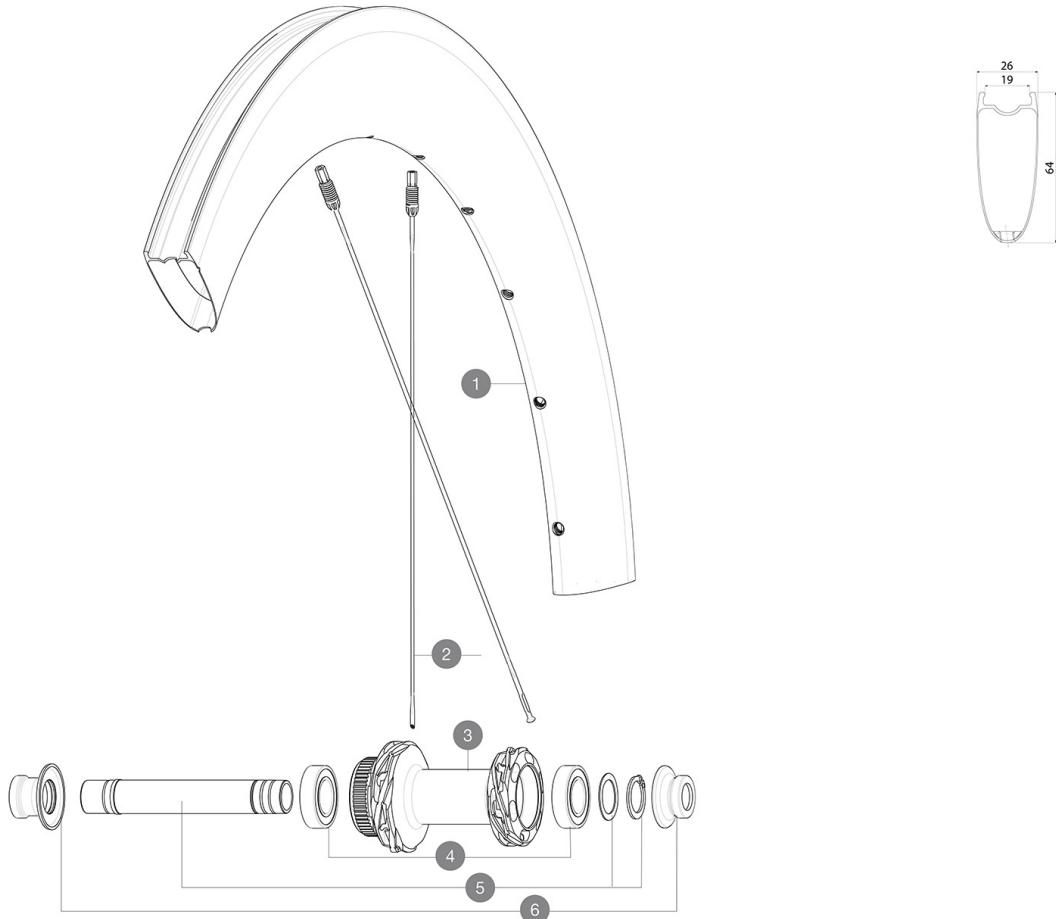

&amp;NBSP;

1 V4094915 Kit Front/Rear rim Cosmic SLR 65 Disc

## SPOKES

2 V4164901 Kit 12 CosmicSLR65 Disc aero sspk M6 259

## HUB SHELLS

3	N/A	HUB BODY
4	M40129	KIT 2 BEARINGS 6902 15x28x7
5	V2373301	KIT QRM AUTO FRONT AXLE 12mm > 2019
6	V2374701	KIT FRONT ROAD FORK REST 12mm FOR J BENT DISC HUB



# Cosmic SLR 65 Disc

2021  
FRONT

## DELIVERED WITH

UST valve and accessories (129 838 01)	
User guide	

## COMPATIBILITY

Freewheel: Shimano/Sram, convertible to Campagnolo and XD-R with optional driver bodies	
Front axle: 12x100 thru axle, easily convertible to quick release with included adapters. Not compatible with 15mm through axles.	
Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters	

## Specifications

### RIMS

- Material : 100% carbon fiber
- Height : 64mm
- Disc brake specific profile
- Tire : UST Tubeless and tubetype
- Internal width : 19 mm
- ETRTO size : 622x19TC Road

Fore Carbon  
UST

### SPOKES

- Material : steel
- Shape : straight pull, elliptical aero, double butted (patented)
- Nipples : Fore integrated aluminum
- Count : 24 front and rear
- Lacing : front and rear crossed 2, contactless

### WHEEL HUB

- Front and rear bodies : aluminum
- Axle material : aluminum
- Front : Quick release and 12x100 through axle compatible
- Rear : Quick Release, 12x142 and 12x135 compatible
- Infinity Hub
- Instant Drive 360
- QRM Auto

### WHEEL WEIGHTS

710

### VERSIONS

- Disc standard : Center Lock (R) only
- Freewheel : Shimano/Sram or XD-Road