

2021 REAR

ASTM CATEGORY 2 : road and offroad with jumps less than 15cm


For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesnn't exceed 120kg, bike included

Recommended tyre sizes: 25 to 32 mm

Max. Pressure: see indication on wheel and tyre. If they differ, use the lowest of the $2\,$

REFERENCES WHEELS

R36971 Ksyrium SL DCL Rr R39121 Ksyrium SL DCL Rr XDR

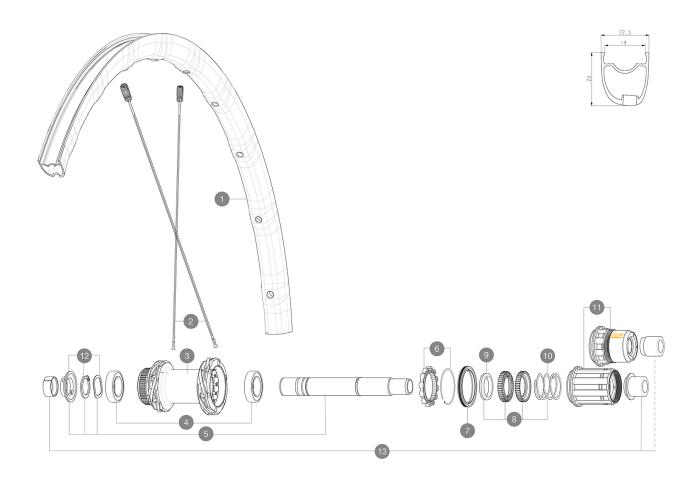

RIMS



:

1 V4093015 Kit Front/Rear rim Ksyrium SL Disc

SPOKES

2 V4163201 Kit 12 Front/Rear Ksyrium SL Disc aero stainless spoke 294mm

HUB SHELLS

3	N/A	HUB BODY
4	M40076	HUB BEARINGS 17x30x7 6903 x 2
5	V2373401	KIT ID360 135/142 DCL L1 AXLE WITH CLIP
6	V2252701	KIT ID360 INSERT SHAPED EAR LOBE > 2017
7	V2251601	KIT ID360 SEAL + GREASE
8	V2251701	KIT ID360 2 RATCHETS + SPRING + GREASE
9	V2500501	KIT ID360 3 PADS NOISE REDUCING
10	V2251801	KIT 3 ID360 ROAD SPRINGS
11	V3430101	HG11 Freewheel Body ID360
11	V2580101	FREEHUB BODY XD Road ID360
12	V2373001	KIT ADJUST. SYSTEM QRM AUTO ID360 for 17x30x7 bearing
13	V3811001	KIT ROAD ID360 RR CL ENDCAP (12MM)



2021 REAR

DELIVERED WITH

UST valve and accessories (129 838 01)	
User guide	

COMPATIBILITY

Freewheel: Shimano/Sram, convertible to Campagnolo and XD-R with optional driver bodies	
Front axle: 12x100 thru axle, easily convertible to quick release with included adapters. Not compatible with 15mm through axles.	
Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters	

Specifications

RIMS

Material: Maxtal
Height: 22 mm
Disc brake specific profile
Weight reduction: ISM 4D
Tire: UST Tubeless and tubetype
Internal width: 19 mm
ETRTO size: 622x19TC Road

Fore UST SUP

SPOKES

- Material : steel

 $\hbox{\bf -Shape:} \ \ \hbox{straight pull, elliptical aero, double butted} \\$

(patented)

• Nipples: Fore integrated aluminum • Count: 24 front and rear

 ${\color{red} \bullet} \, \text{Lacing}: \, \text{front and rear crossed 2, contactless}$

WHEEL HUB

Front and rear bodies : aluminumAxle material : aluminum

• Front: Quick release and 12x100 through axle

compatible

• Rear: Quick Release, 12x142 and 12x135

compatible Infinity Hub Instant Drive 360 QRM Auto

VERSIONS

Disc standard: Center Lock (R) only
Freewheel: Shimano/Sram or XD-Road

WHEEL WEIGHTS

852